

SOD-323 Plastic-Encapsulate ESD Protection Diodes


Features

- Low leakage current
- Low clamping voltage
- IEC 61000-4-2 (ESD Air): ±30kV
- IEC 61000-4-2 (ESD Contact): ±30kV
- IEC 61000-4-5 (Lightning 8/20μs): 38A

Applications


- Cellular Handsets and Accessories
- Personal Digital Assistants
- Notebooks and Handhelds
- Portable Instrumentation, Digital Cameras
- Peripherals, Audio Players, Industrial Equipment

Function Diagram



Reverse Working Voltage  
3.3V Max.  
Normal capacitance  
50pF(Typ.)

SOD-323




Maximum Ratings (Ta=25°C Unless otherwise specified)

| SYMBOL           | PARAMETER                           | CONDITIONS                      | VALUE       | UNIT |
|------------------|-------------------------------------|---------------------------------|-------------|------|
| V <sub>ESD</sub> | Electrostatic Discharge Voltage     | ESD per IEC 61000-4-2( Air )    | ±30         | KV   |
|                  |                                     | ESD per IEC 61000-4-2( Contact) | ±30         | KV   |
| P <sub>PP</sub>  | Peak Pulse Power                    | tp = 8/20 μs                    | 450         | W    |
| I <sub>PP</sub>  | Rated Peak Pulse Current            | tp = 8/20 μs                    | 38          | A    |
| T <sub>J</sub>   | Operating JunctionTemperature Range | —                               | -55 to +150 | °C   |
| T <sub>STG</sub> | Operating JunctionTemperature Range | —                               | -55 to +150 | °C   |

Electrical Parameter




| SYMBOL           | PARAMETER                                        |
|------------------|--------------------------------------------------|
| V <sub>C</sub>   | Clamping Voltage @ I <sub>PP</sub>               |
| V <sub>BR</sub>  | Breakdown Voltage @ I <sub>T</sub>               |
| I <sub>PP</sub>  | Peak Pulse Current                               |
| I <sub>T</sub>   | Test Current                                     |
| I <sub>R</sub>   | Reverse Leakage Current @ VRWM                   |
| V <sub>RWM</sub> | Peak Reverse Working Voltage                     |
| P <sub>PP</sub>  | Peak Pulse Power Dissipation                     |
| C <sub>J</sub>   | Junction Capacitance @ V <sub>R</sub> =0V,f=1MHz |
| I <sub>F</sub>   | Forward Current                                  |
| V <sub>F</sub>   | Forward Voltage @I <sub>F</sub>                  |

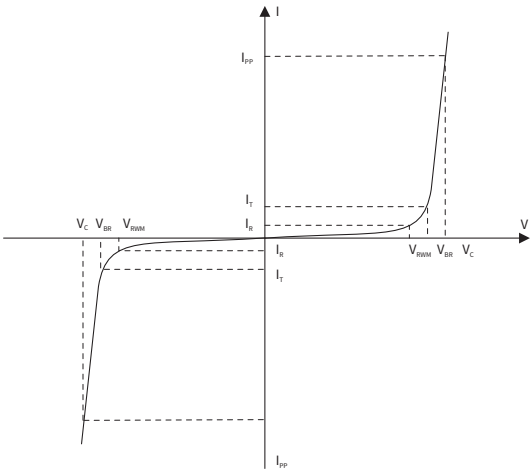

● **Electrical Characteristics** (Ta=25°C Unless otherwise specified)

| PARAMETER                    | SYMBOL    | CONDITION                       | Min | Typ | Max | UNIT |
|------------------------------|-----------|---------------------------------|-----|-----|-----|------|
| Peak Reverse Working Voltage | $V_{RWM}$ | $T_a=25^{\circ}C$               | —   | —   | 3.3 | V    |
| Breakdown Voltage            | $V_{BR}$  | $I_T=1mA, T_a=25^{\circ}C$      | 4.0 | 4.7 | 6.0 | V    |
| Reverse Leakage Current      | $I_R$     | $V_{RWM}=3.3V, T_a=25^{\circ}C$ | —   | —   | 200 | nA   |
| Clamping Voltage             | $V_C$     | $I_{PP}=20A, t_p=8/20\mu s$     | —   | —   | 8.5 | V    |
| Clamping Voltage             | $V_C$     | $I_{PP}=38A, t_p=8/20\mu s$     | —   | —   | 12  | V    |
| Junction Capacitance         | $C_J$     | $V_{RWM}=0V, f=1MHz$            | —   | 50  | 70  | pF   |

● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

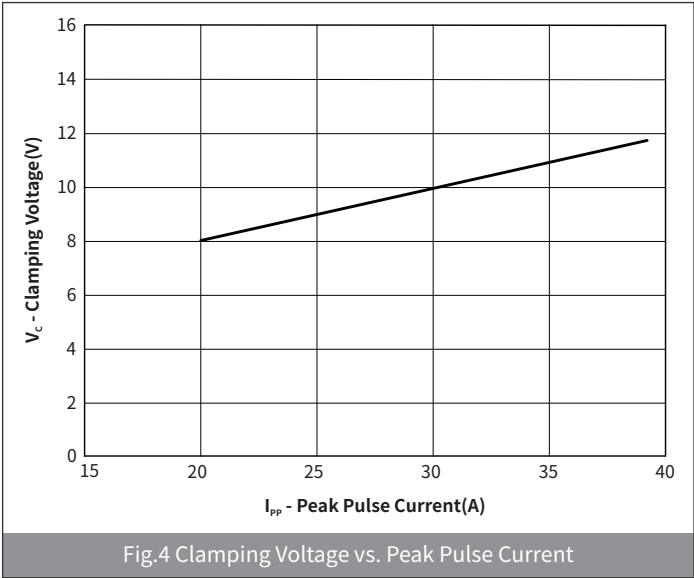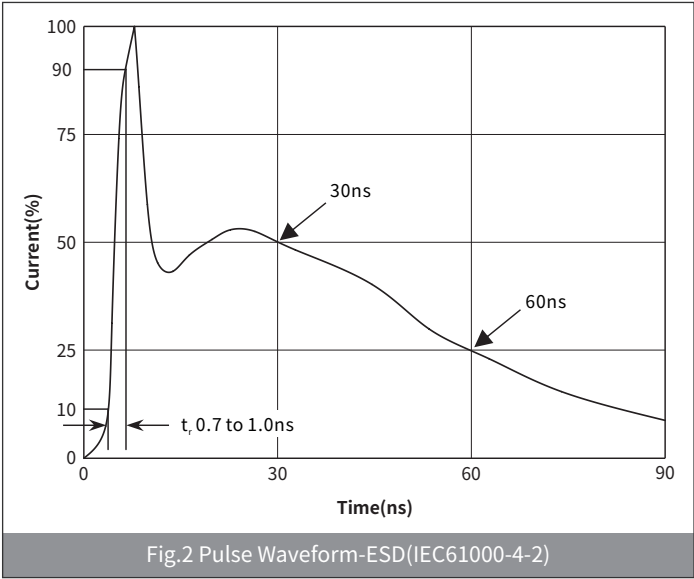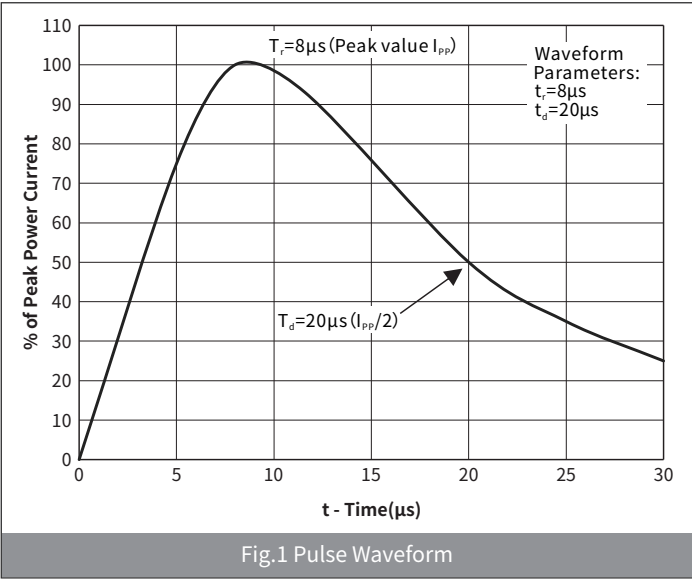


# H3V3ND3BA

Bi-directional 3.3V Normal Capacitance ESD


## Ordering Information

| PACKAGE | PACKAGE CODE | UNIT WEIGHT(g) | REEL(pcs) | BOX(pcs) | CARTON(pcs) | DELIVERY MODE |
|---------|--------------|----------------|-----------|----------|-------------|---------------|
| SOD-323 | R1           | 0.0048         | 3000      | 45000    | 180000      | 7"            |

## Recommended Soldering Conditions

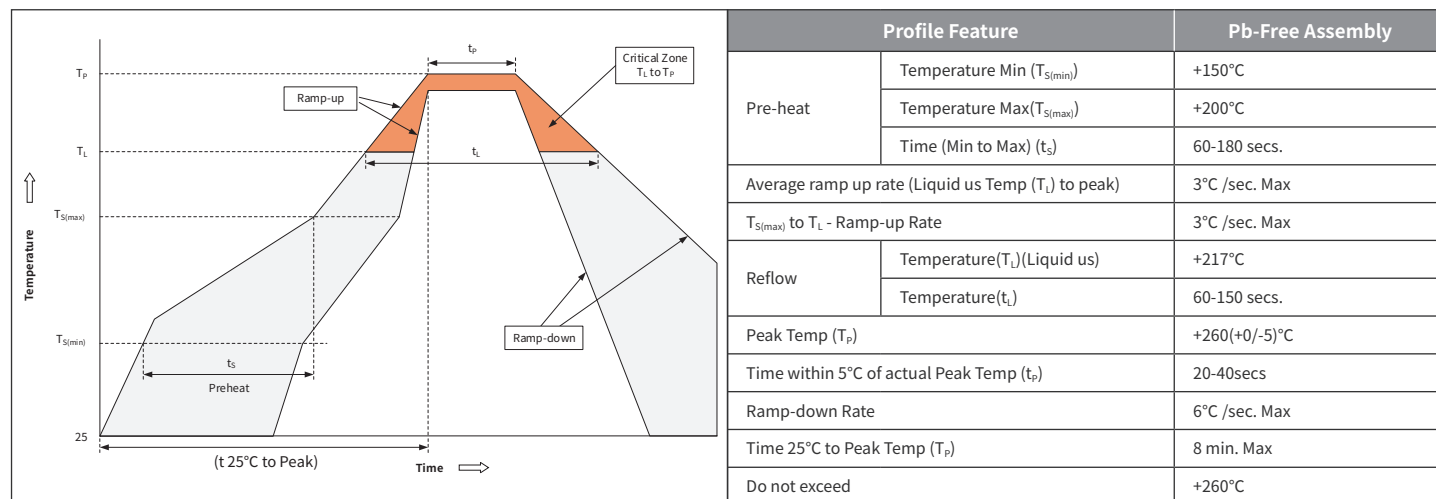

## Package Outline Dimensions (SOD-323)

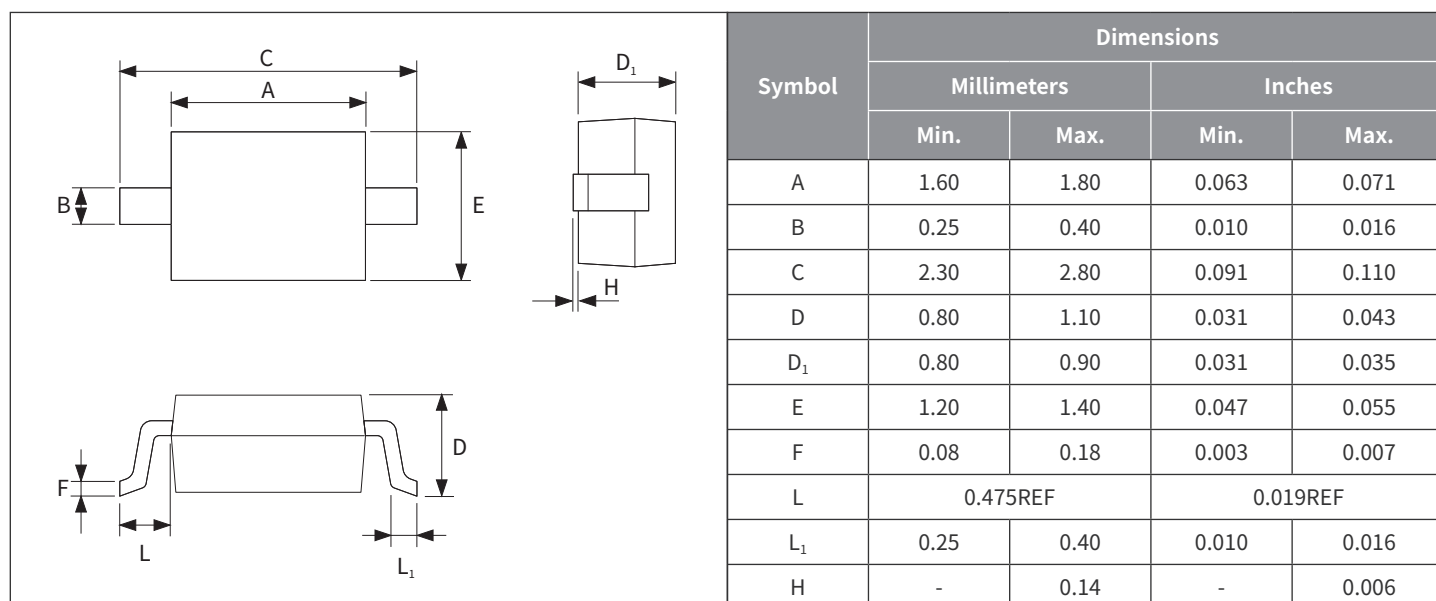

## Suggested Pad Layout

