



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.



* UNLESS OTHERWISE SPECIFIED TOLERANCES
ON DECIMAL IS: ANGLE $\pm 1^\circ$
UNIT: MM .XX ± 0.35

BACKSHELL KIT INCLUDES:

- (2) BACKSHELL HALVES
- (3) HOUSING SCREWS
- (1) 4-40 LONG THUMBSCREWS
- (1) 4-40 SHORT THUMBSCREWS
- (1) SET OF COMPRESSION INSERTS-VARIOUS SIZES
DIAMETERS 4mm(.157"), 5mm(.167"), 7mm(.276"), 9mm(.354")

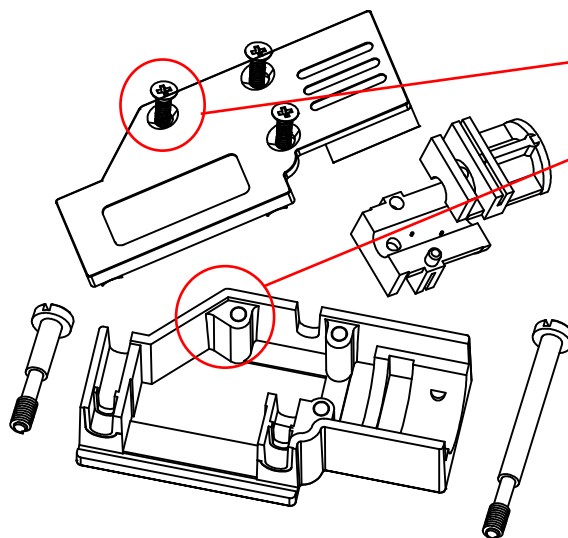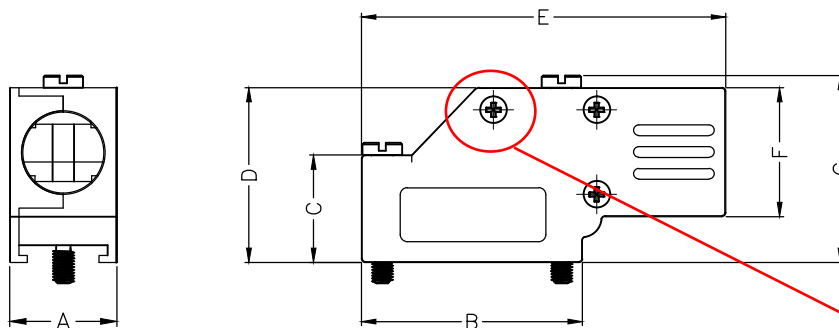

DIMENSIONS(mm/in)							
SIZE	A $\pm 1.20_{0.047}$	B $\pm 1.20_{0.047}$	C $\pm 0.80_{0.031}$	D $\pm 0.80_{0.031}$	E $\pm 0.80_{0.031}$	F $\pm 0.80_{0.031}$	G $\pm 0.80_{0.031}$
9	15.0	30.8	15.0	24.4	50.8	18.0	26.2
	0.59	1.21	0.59	0.96	2.0	0.71	1.03
25	15.8	53.3	23.1	34.5	72.4	24.3	36.6
	0.62	2.10	0.91	1.36	2.85	0.96	1.44

说明：图上是9pin的外观和结构，25pin的结构有些差异，
比如螺丝孔位置也不一样。

Note: The picture as left is for size 9 pin, size 25pin has some
difference, such as the position of screw hole.

ORDERING INFORMATION:

SIZE	P/N - KITTED	PRODUCT CODE
9-WAY	6560-0501-01	MHDCMR9-RA-K
25-WAY	6560-0501-03	MHDCMR25-RA-K

BACKSHELL: MATERIAL: DIE CAST ZINC ALLOY
PLATING: NICKEL PLATED
4-40 THUMBSCREWS: STEEL-Zn PLATED
HOUSING SCREWS: STEEL-Zn PLATED
COMPRESSION INSERT: ABS, UL RECOGNIZED
OPERATING TEMP: -40°C TO +120°C



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.



THESE DRAWINGS AND SPECIFICATIONS ARE THE
PROPERTY OF MH CONNECTORS AND SHALL NOT BE
REPRODUCED, COPIED OR USED AS THE BASIS FOR
THE MANUFACTURE OR SALE OF APPARATUS WITHOUT
WRITTEN PERMISSION.

DRAWN
JOHNNY

DATE
11-24-15

APPROVED
Victor Lin

DATE
11-24-15

SCALE
1 : 1

SHEET OF
1 OF 1

REV:
4.0

DRAWING No
MHDCMRXX-RA-K

MH CONNECTORS ,
DIVISION OF EDAC