
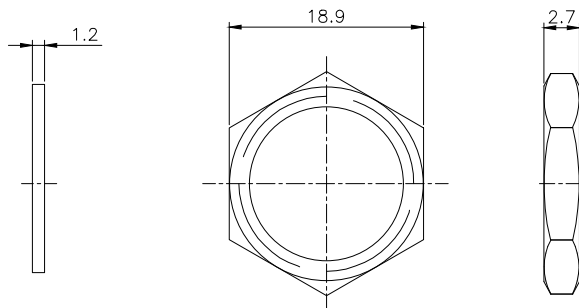


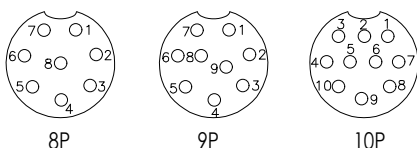

Coupling:	Threaded coupling
Shell material:	Brass with Nickel Plate
Insert material:	bakelite
Contact material:	copper Silver Plate/Nickel
Termination:	Solder
Mating cycle:	500
Cable diameter:	-20°C +85°C

No. of Pin 2~10 Pin	Contact Type F=Female M=Male
2 Pin	F
3 Pin	F
4 Pin	F
5 Pin	F
6 Pin	F
7 Pin	F
8 Pin	F
9 Pin	F
10 Pin	F

NO.of contacts	芯数	2	3	4	5	6	7	8	9	10
Rated current(A)	额定电流	7A	7A	7A	7A	5A	5A	5A	5A	5A
Operation limit voltage(AC.V.rms)	工作电压(AC.V)分钟	220V	220V	125V	125V	125V	125V	125V	125V	125V
Withstanding voltage(AC.V.rms) 1 minute	耐电压	1500	1500	1500	1000	1000	1000	1000	1000	1000
Insulation resistance(m Ω)	绝缘阻抗	1500	1500	1500	1000	1000	1000	1000	1000	1000
Contact resistance (m Ω)	接触阻抗	3	3	3	4	5	5	4	5	5
Solder cup mouth aperture	焊杯口孔径 ϕ (mm)	ϕ 1.4	ϕ 1.4	ϕ 1.4	ϕ 1.2	ϕ 0.8	ϕ 0.8	ϕ 0.8	ϕ 0.8	ϕ 0.8
Solder in diameter	接触孔径 ϕ (mm)	ϕ 2.5	ϕ 2.5	ϕ 2.5	ϕ 2.0	ϕ 1.2	ϕ 1.2	ϕ 1.2	ϕ 1.2	ϕ 1.2

			GENERAL TOLERANCE	制 图 DRAWING	 深圳讯答科技有限公司 ShenzhenXundaTechnology Co.,Ltd				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL		产品名称 TITLE	GX16 航空插头 公头	版 本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE		产品料号 PART NO.	XD-GX16-NP-M	单 位 UNITS	mm
			X.XXX ±0.10						
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL		页 次 SHEET	1/1