

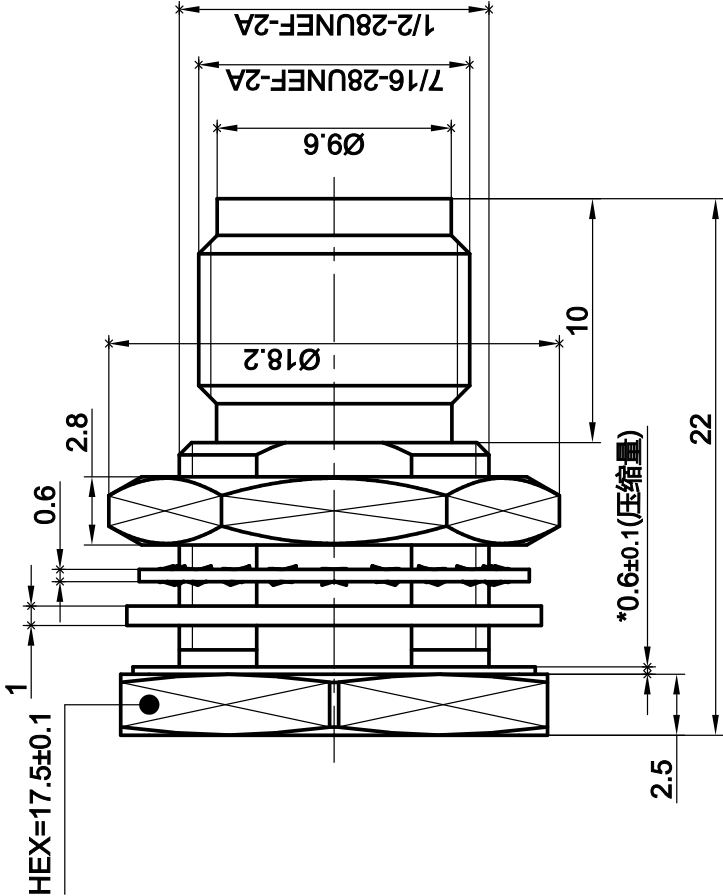


- 1.材料和电镀\Materials and Finishes:
- 外 壳\Body - 黄铜\Brass,镀镍\Nickel plating
- 内导体\Contact - 铍铜\Beryllium copper,镀金\Gold plating
- 绝缘体\Insulator - 聚四氟乙烯\PTFE,本色\natural
- 螺 母\Nut - 黄铜\Brass,镀镍\Nickel plating
- 齿 垫\Lock washer - 磷青铜\Phosphor copper,镀镍\Nickel plating
- 密封圈\Gasket - 硅橡胶\Silicone rubber
- 2.电气性能\Electrical:

- A.特性阻抗\Impedance:50 Ohm
- B.使用频率\Frequency range:DC - 6GHz
- C.介质耐压\Breakdown voltage:750V rms
- D.绝缘电阻\Insulation resistance:5000 MΩ
- 3.机械性能\Mechanical:
- A.使用寿命\Durability:500 cycles
- 4.防水等级：IP65（外部防水）

建议安装开孔

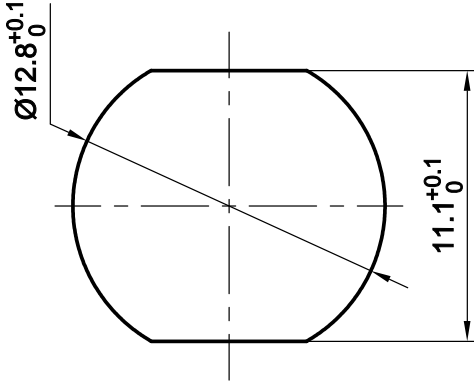

客户	料号
信息	规格
设 计	JAT2021.08.12
审 核	DF2021.08.12
批 准	DF2021.08.12

版次	V2.0	比 例	3:1	料 号	CT6.1.373
第一角法				规 格	TNC/MCX-KKY-2
				名 称	IP65穿墙TNC母转MCX母
				entitle www.cntitle.net	