
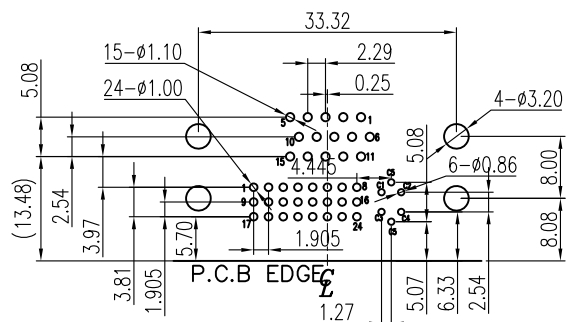
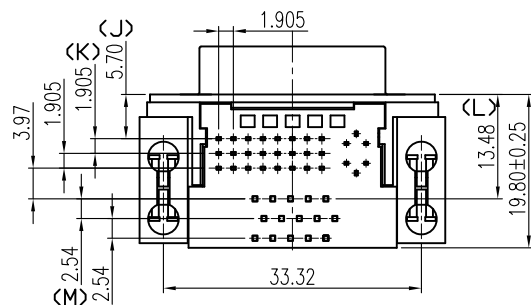
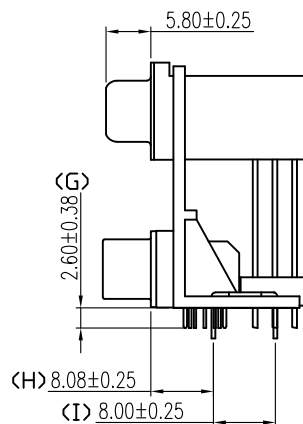


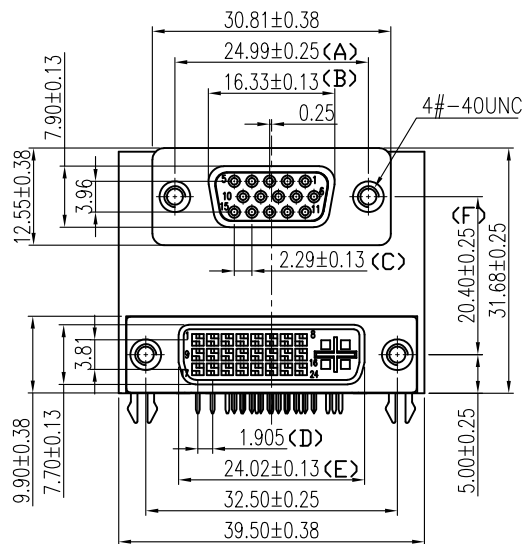

RECOMMENDED P.C.B LAYOUT

INSPECTION DIMENSION:(A)~(M)

NOTES

- MATERIAL:
Housing(VGA):PBT, UL 94V-0, Color:Blue.
Housing(DVI):PBT, UL 94V-0, Color:Ivory.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
- FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- VGA
1.1 Voltage: 250 VAC(RMS) Max.
1.2 Current Rating: 3 Ampere per Contact
1.3 Contact Resistance: 25 Milliohms Max.
1.4 Insulation Resistance: 5000 Megohms Min.
1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
1.6 Total Mating Force: 6.0 Kgf Max.
1.7 Total Unmating Force: 1.2 Kgf Min.
1.8 Operating Temperature: -55°C to $+85^{\circ}\text{C}$
- DVI
2.1 Voltage: 40 VAC(RMS) Max.
2.2 Current Rating: 1.5 Ampere per Contact
2.3 Contact Resistance: 20 Milliohms Max.
2.4 Insulation Resistance: 1000 Megohms Min.
2.5 Dielectric Withstanding Voltage: 500V DC(RMS)
2.6 Total Mating Force: 4.5 Kgf Max.
2.7 Total Unmating Force: 1.0 Kgf Min.
2.8 Operating Temperature: -55°C to $+85^{\circ}\text{C}$



深圳市华宇创精密电子有限公司

TOLERANCE: XX ± 0.30 XXX ± 0.25 XXX ± 0.15 X° $\pm 2^{\circ}$ X.X° $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: HDR15母+DVI 24+5铆合20.40
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYCW17-DVI43-204B
UNIT: mm [inch]	APPROVED BY:	DATE : 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4	邱国夷		DRAW NO: HYC-DVI18030214
			SHEET NO. 1 OF 1