



name部位名称	unit 符号	specification 尺寸规格
No. of conductors导体数	pin	(N)P
margin width边距	M	0.5±0.08
Pinch间距	P	0.5±0.08
Total pitch总间距	SP	(N-1)×0.5±0.08
width总宽度	W	(N-1)×0.5±0.08
strip length 1端子长度1	S1	3±0.5
strip length 2端子长度2	S2	3±0.5
reinforcing tape length 1 补强板长度1	B1	4±2.0
reinforcing tape length 2 补强板长度2	B2	4±2.0
Total length产品长度	TL	(L)±2MM
Insulation length绝缘体长度	IL	(L-S1-S2)±2
Thickness insulation产品厚度	T	0.121±0.03
Cable thickness末端厚度	T1/T2	0.303±0.03
slanting切割斜度	A	< 0.3

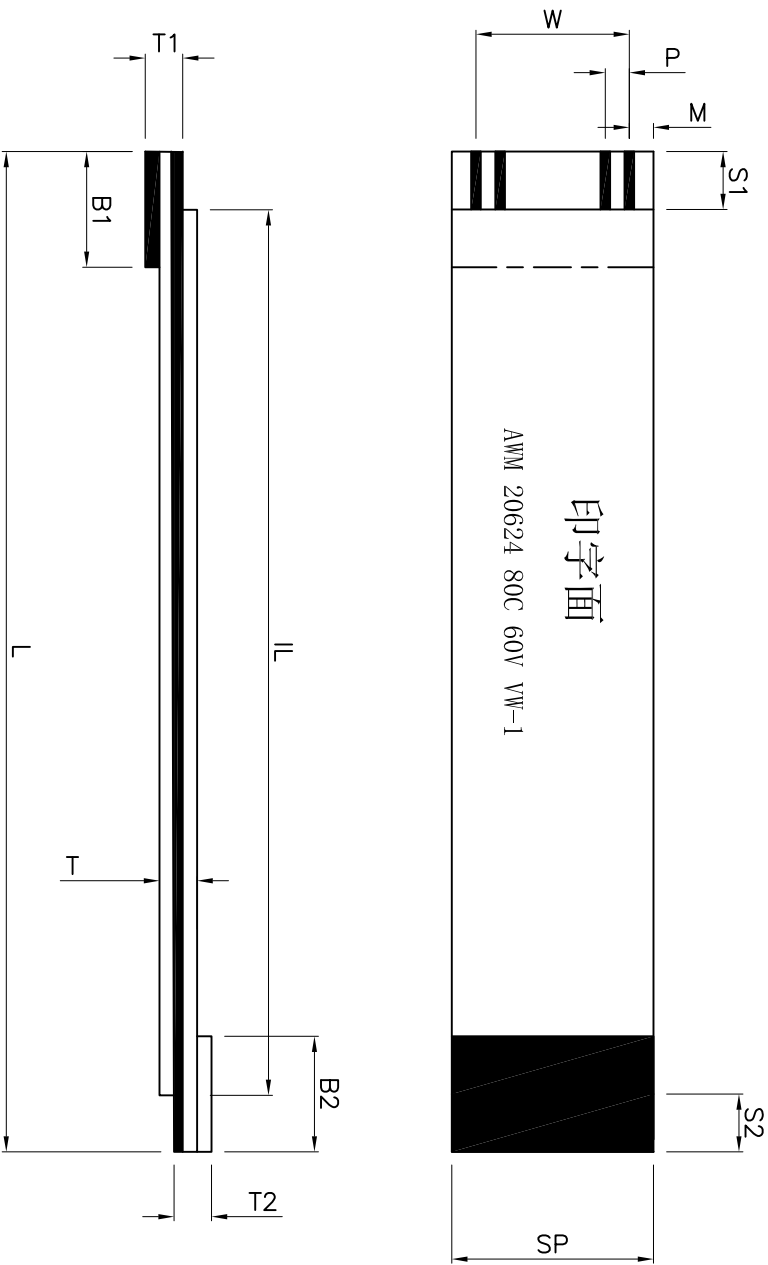

型号: FC-0.5A-XXP-XXXXMM
0.5: 0.5mm Pitch 间距
A: oppositedirectionge表示反向
NP: PIN位数
XXX:总长度
MM: 单位



										APPROVALS		DATE		DEALON 德隆® ELECTRONICS CO.,LTD			
DRAWN		G.M.Chen		2015/5/22				TITLE:		DC JACK							
CHECKED								PART NO.		FC-0.5A-XP-XXXXMM							
APPROVALS																	