


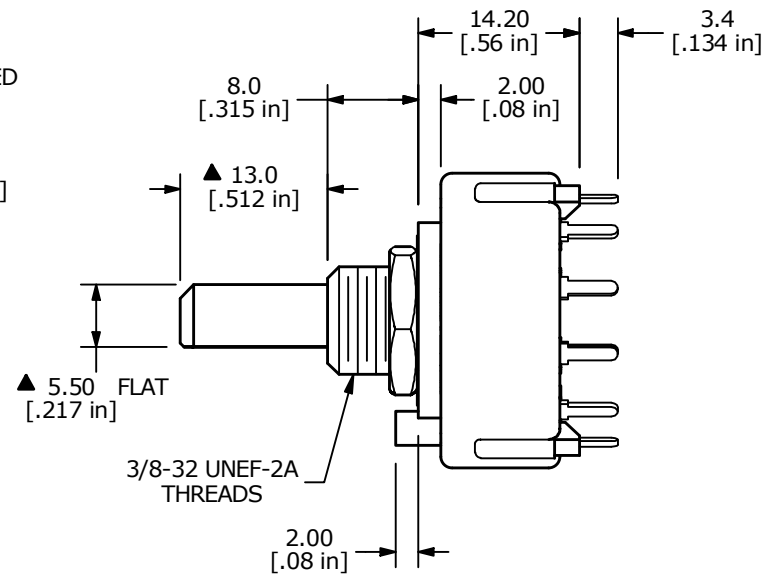


▲ CONTACT CONFIGURATION
TIMING (MBB) SHORTING

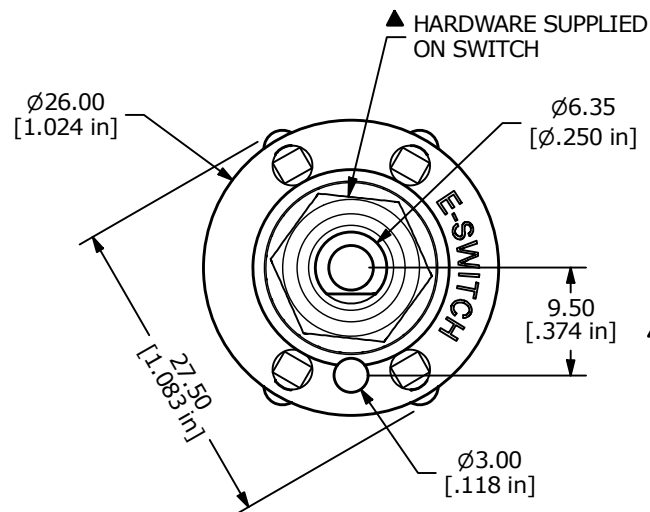

NOTE:

1. ALL DIMENSIONS IN MM[INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 125V AC 0.3A
6. OPERATING FORCE: $.8 \pm .3$ kg-cm
7. OPERATING TEMP: -30°C to 85°C
- ▲ 8. CIRCUIT SP: 11 POSITION 30° INDEX.
9. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
- ▲ 10. HARDWARE SUPPLIED ON SWITCH: LOCKWASHER, HEXNUT
11. ▲ DENOTES CRITICAL PARAMETER.

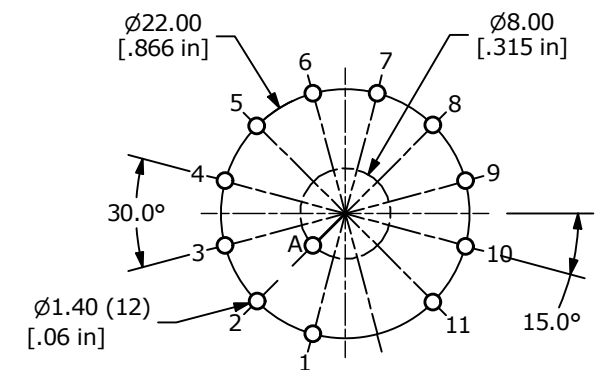

P.C.B MOUNTING LAYOUT



E-SWITCH®

A	24502	RELEASE	9/24/20	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE KC51A13.001SPS				
SCALE 3:2	DATE 9/24/2020	DR MW	DWG G510618	REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[KC51A13.001SPS](#)