


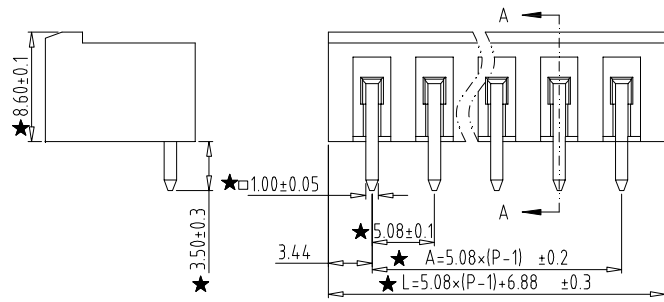
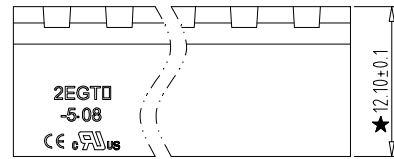


由Autodesk教育版产品制作

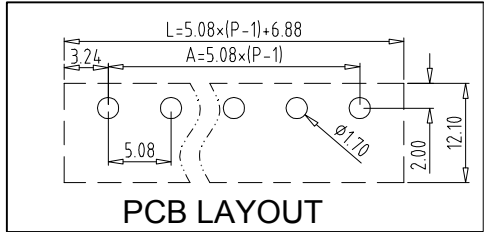

Electrical :

- 1.Rated Voltage :

2.Rated Current :

3.Withstanding Voltage :

4.Operating Temperature :

5. RoHS Compliance;

6.Safety Approval :

7." ★ " is the key quality control point.
- UL

300V


15A

AC1600V/1Min;

-40°C~+105°C;
- IEC

320V

20A

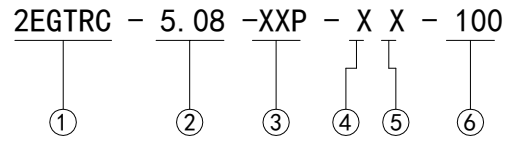

- ① Sereies No.

② Pitch

③ Poles

④ 1 Single Pitch
2 Double Pitch

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 100--Standard
- 02 02Contacts

03 03Contacts

...

24 24Contacts

Total Pitch Tolerances in mm									Nominal dimension range in mm									⊥	≡	—	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over		over 0	over 100	over
to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to to	to to	to to	to to	to 115	to 150	to 200	to 250	to 320	to to	10	all	to to	to 150	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5

				OPERATION	SCALE	Fit	Yxcon 东莞市宇熙精密连接器有限公司				
				X.X ±0.25	UNIT	MM	www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.				
				X.XX ±0.20	SIZE	A4	DESIGN	赵文品2024. 10. 10	PART NO.	2EGTRC-5. 08-XXP-XX-100	
				X.XXX ±0.10	SHEET	1/1	CHECK		TITLE:		
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	ANGLE ±3°	PROJ.		APPROVE		Customer No.		
				DIM TOL							