
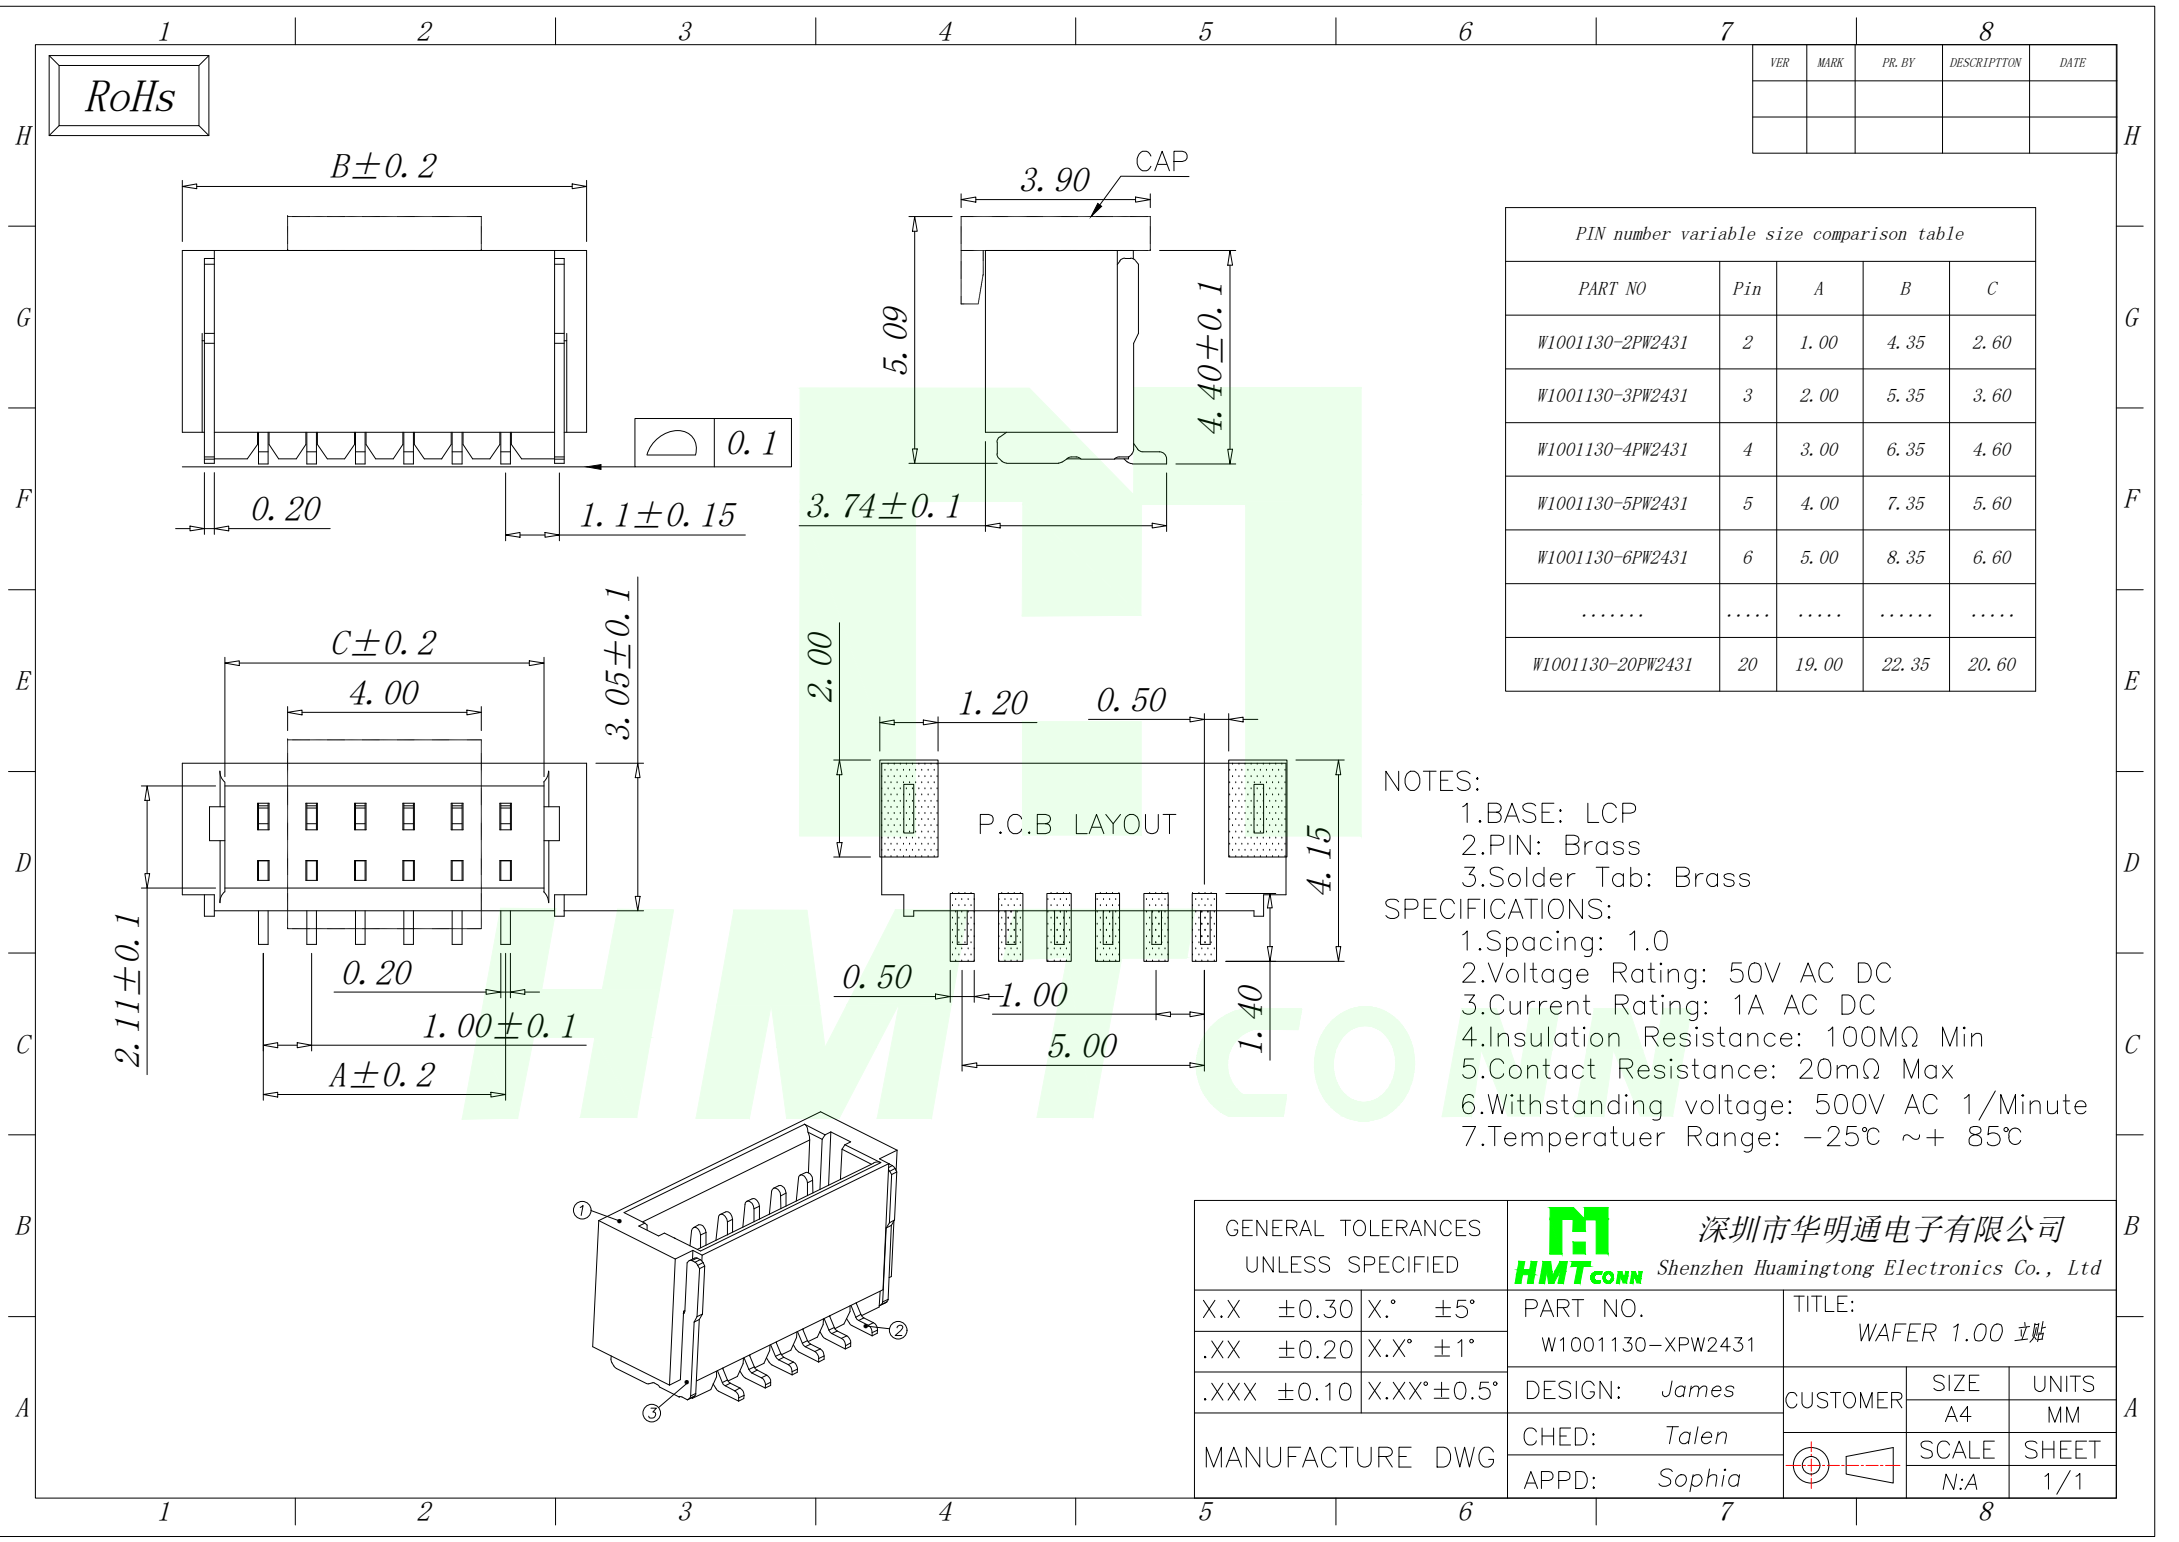




VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table				
PART NO	Pin	A	B	C
W1001130-2PW2431	2	1.00	4.35	2.60
W1001130-3PW2431	3	2.00	5.35	3.60
W1001130-4PW2431	4	3.00	6.35	4.60
W1001130-5PW2431	5	4.00	7.35	5.60
W1001130-6PW2431	6	5.00	8.35	6.60
.....				
W1001130-20PW2431	20	19.00	22.35	20.60

- NOTES:
- 1.BASE: LCP
 - 2.PIN: Brass
 - 3.Solder Tab: Brass
- SPECIFICATIONS:
- 1.Spacing: 1.0
 - 2.Voltage Rating: 50V AC DC
 - 3.Current Rating: 1A AC DC
 - 4.Insulation Resistance: 100MΩ Min
 - 5.Contact Resistance: 20mΩ Max
 - 6.Withstanding voltage: 500V AC 1/Minute
 - 7.Temperatuer Range: -25℃ ~+ 85℃

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.° ±5°	PART NO. W1001130-XPW2431		TITLE: WAFER 1.00 立贴	
.XX ±0.20	X.X° ±1°	DESIGN: James		CUSTOMER	SIZE A4
.XXX ±0.10	X.XX° ±0.5°	CHED: Talen			UNITS MM
MANUFACTURE DWG		APPD: Sophia			SCALE N:A
					SHEET 1/1