





RoHs

NOTES:


- 1.BASE: LCP
- 2.PIN: Brass
- 3.Solder Tab: Brass

SPECIFICATIONS:

- 1.Spacing: 2.5
- 2.Voltage Rating: 250V AC DC
- 3.Current Rating: 3A AC DC
- 4.Insulation Resistance: 800MΩ Min
- 5.Contact Resistance: 20mΩ Max
- 6.Withstanding voltage: 1000V AC 1/Minute
- 7.Temperatuer Range: -25℃ ~+ 85℃

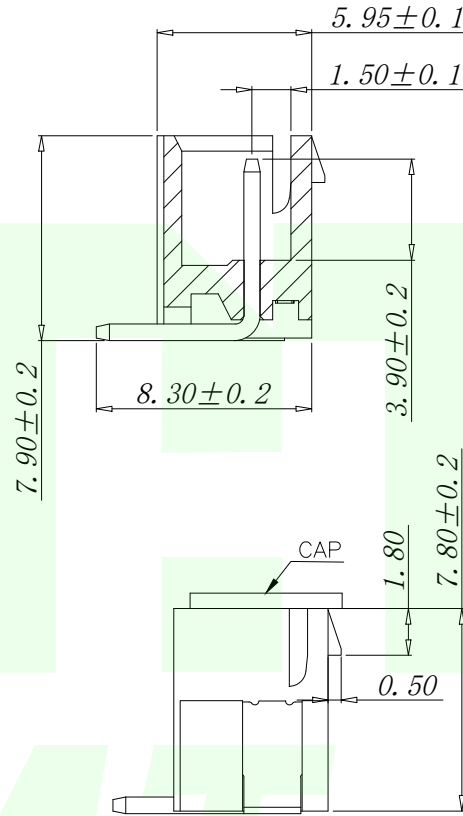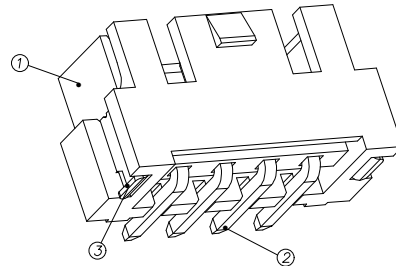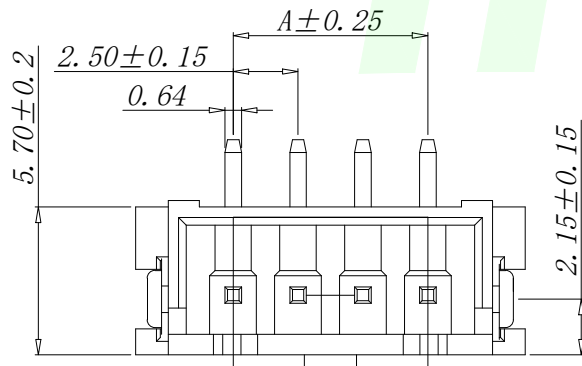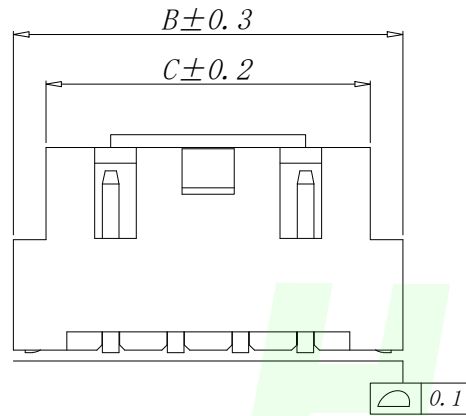

PIN number variable size comparison table				
PART NO	PIN	A	B	C
W254113K-2PW2431	2	2.50	10.00	7.50
W254113K-3PW2431	3	5.00	12.50	10.00
W254113K-4PW2431	4	7.50	15.00	12.50
W254113K-5PW2431	5	10.00	17.50	15.00
W254113K-6PW2431	6	12.50	20.00	17.50
W254113K-7PW2431	7	15.00	22.50	20.00
.....				
W254113K-16PW2431	16	37.50	45.00	42.50

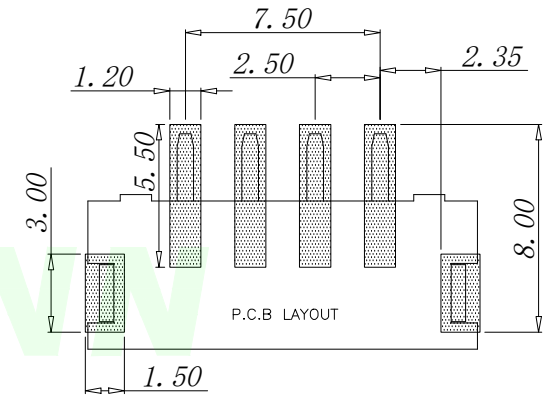

GENERAL TOLERANCES
UNLESS SPECIFIED

X.X	±0.30	X.°	±5°
.XX	±0.20	X.X°	±1°
.XXX	±0.10	X.XX°	±0.5°
MANUFACTURE DWG			



深圳市华明通电子有限公司
Shenzhen Huamingtong Electronics Co., Ltd

PART NO.	TITLE:		
W254113K-XPW2431	WAFER XHB2.54 立贴带扣		
DESIGN: James	CUSTOMER	SIZE	UNITS
CHED: Talen		A4	MM
APPD: Sophia		SCALE	SHEET
		N:A	1/1