

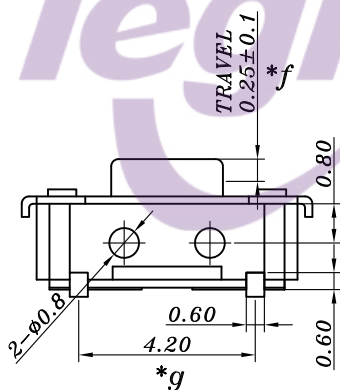
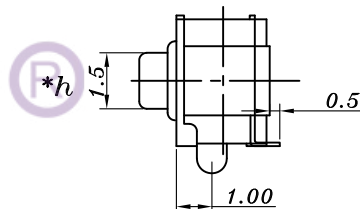
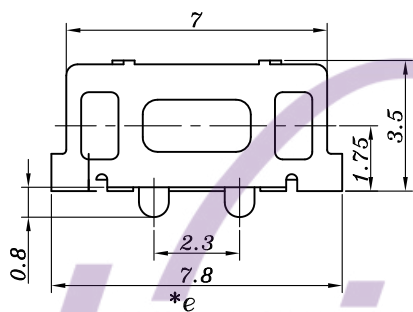
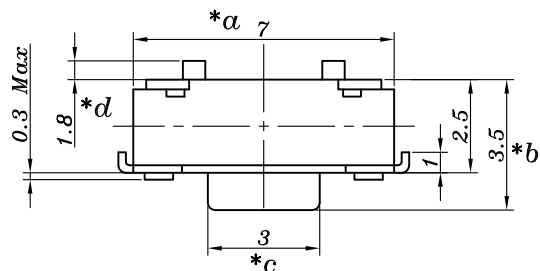


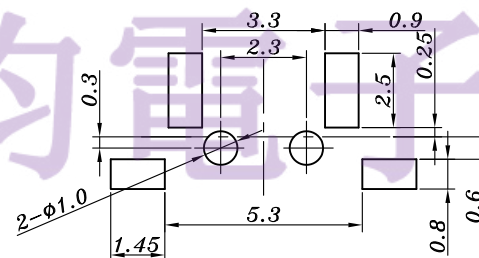

SPECIFICATION

1. Rating : DC12V 50mA.
2. Contact resistance: $\leq 100\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC100V).
4. Withstanding voltage: 250VAC .
5. Operating Force: 250±80gf
6. life test: 50,000 cycles.
7. Operation temperature range: -25℃~85℃.
- 8 Sign"* "is importance dimension.



P.C.B LAYOUT

					TOLERANCE UNLESS SPECIFIED								
					<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	1						
							NO	DATE	REVISIONS			BY	APPD
4	CONTACT FOOT	BRASS	2	Ag-Plated	TITLE: TACT SWITCH				UNIT : MM	ROHS	DWN		
3	COAT	BRASS	1	Ag-Plated	MODEL: TS-1112E-E 脚加长1.8mm				SCALE: 1:1	COMPLIANT	CHK'D		
2	BUTTON	LCP	1		东莞市六钧电子五金有限公司						APPD		
1	HOUSING	PA9T	1										
NO.	PART	NAME	MATERIAL	QTY	FINISHING								