

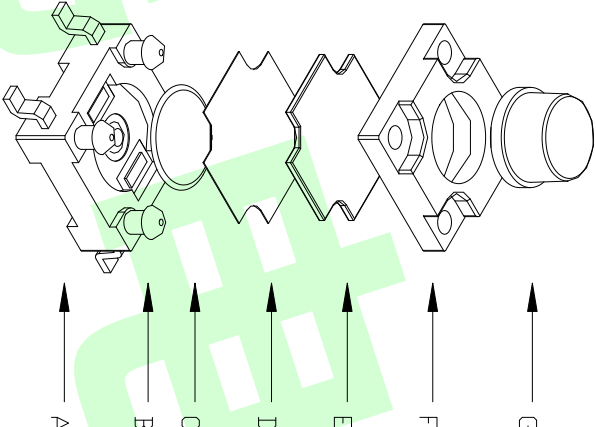
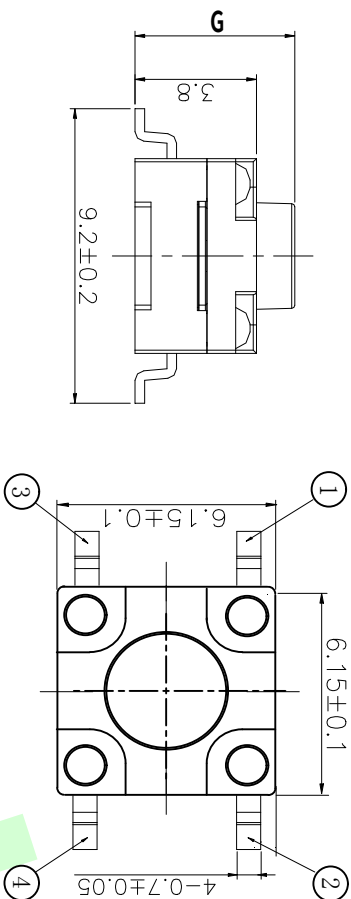


额定负荷	Rating	DC 12V/50mA
接触电阻	Contact Resistance	100mΩ max.
绝缘电阻	Insulation resistance	DC100V 60S 100MΩ min.
抗电强度	Dielectric strength	AC250V(50~60HZ) 60S min.
操作力	Operation force	160/250±50gf
寿命试验	Operating Life	100,000 cycles
行程	Travels	0.30±0.1mm

OPERATING FORCE	
VIGOR	
180 ± 50gf	
250 ± 50gf	
350 ± 50gf	



TOTAL		HEIGHT	
G	$\varnothing$	G	$\varnothing$
4.3	3.5	7.5	3.3
4.5	3.5	8.0	3.3
5.0	3.5	8.5	3.3
5.5	3.5	9.0	3.1
6.0	3.5	9.5	3.1
6.5	3.3	10	3.1
7.0	3.3	10.5	3.1

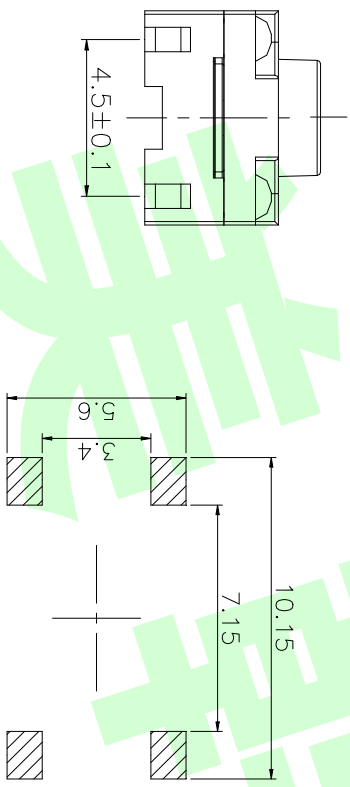


PCB. 焊接图

PCB. WELDING DRAWING

电路图

CIRCUIT DIAGRAM



公差									
GENERAL TOLERANCE									
项目 ITEM		名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINISH/COLOR				
A4		东莞市美韩电子科技有限公司 Dongguan Usakro Electronic Technology Co., Ltd.							
MM									
设计 Jack Jin	图面 单位								
审核 Jacky Zhong	比例 重量 页码 版次								
批准 Tony Meng	1/1 A/0	1 : 1		DWG NO.		型号 3JK-B02123T-G6.0-250JZ		SIZE A4	
		1 of 1		PART NO.		规格 : 6*6 防水/贴片		VER R	
第一视角									
≥0~2<								± 0.15	
≥2~5<								± 0.25	
≥5								± 0.35	
角度 ANGLE								± 0.5 °	
未注尺寸公差(mm)									