


DESCRIPTION

- High Collector-Emitter Breakdown Voltage-: $V_{(BR)CEO}=250V(\text{Min})$
- Good Linearity of h_{FE}
- Complement to Type NJW0281G

APPLICATIONS

- Designed for high fidelity audio amplifier and other linear applications

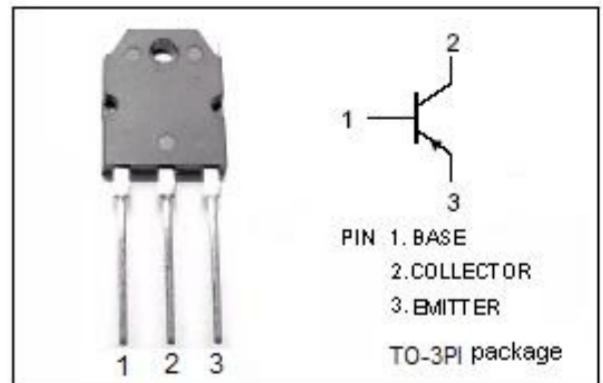


ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-250	V
V_{CEO}	Collector-Emitter Voltage	-250	V
V_{CEX}	Collector-Emitter Voltage $V_{EB}=5V$	-250	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current-Continuous	-15	A
I_{CM}	Collector Current-Peak	-30	A
I_B	Base Current-Continuous	-1.5	A
P_T	Total Power Dissipation @ $T_C=25^\circ\text{C}$	150	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-65~150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
R_{thj-c}	Thermal Resistance, Junction to Case	0.63	$^\circ\text{C/W}$

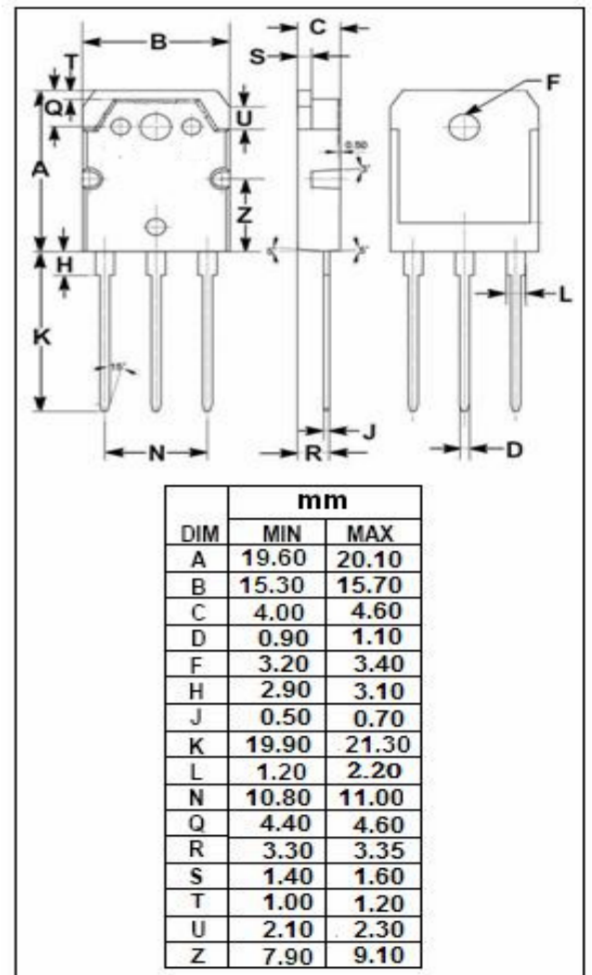

Ordering Information

Product	Package	Packaging
NJW0302GT4TL	TO-3PN	Tube

**ELECTRICAL CHARACTERISTICS****T_C=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{CEQ(SUS)}	Collector-Emitter Sustaining Voltage	I _C =- 100mA; I _B = 0	-250			V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C = -10A; I _B =- 1A			-0.6	V
V _{BE(on)}	Base-Emitter On Voltage	I _C = -8A; V _{CE} = -5V			-1.5	V
I _{CBO}	Collector Cutoff Current	V _{CB} =- 250V			-50	mA
I _{CEO}	Collector Cutoff Current	V _{CE} =- 250V			-50	mA
I _{EBO}	Emitter Cutoff Current	V _{EB} =- 5V			-5	mA
h _{FE-1}	DC Current Gain	I _C = -0.1A; V _{CE} =-5V	75		150	
h _{FE-2}	DC Current Gain	I _C = -1A; V _{CE} = -5V	75		150	
h _{FE-3}	DC Current Gain	I _C = -3A; V _{CE} = -5V	75		150	
h _{FE-4}	DC Current Gain	I _C =- 5A; V _{CE} = -5V	45			
h _{FE-5}	DC Current Gain	I _C =- 8A; V _{CE} = -5V	15			