


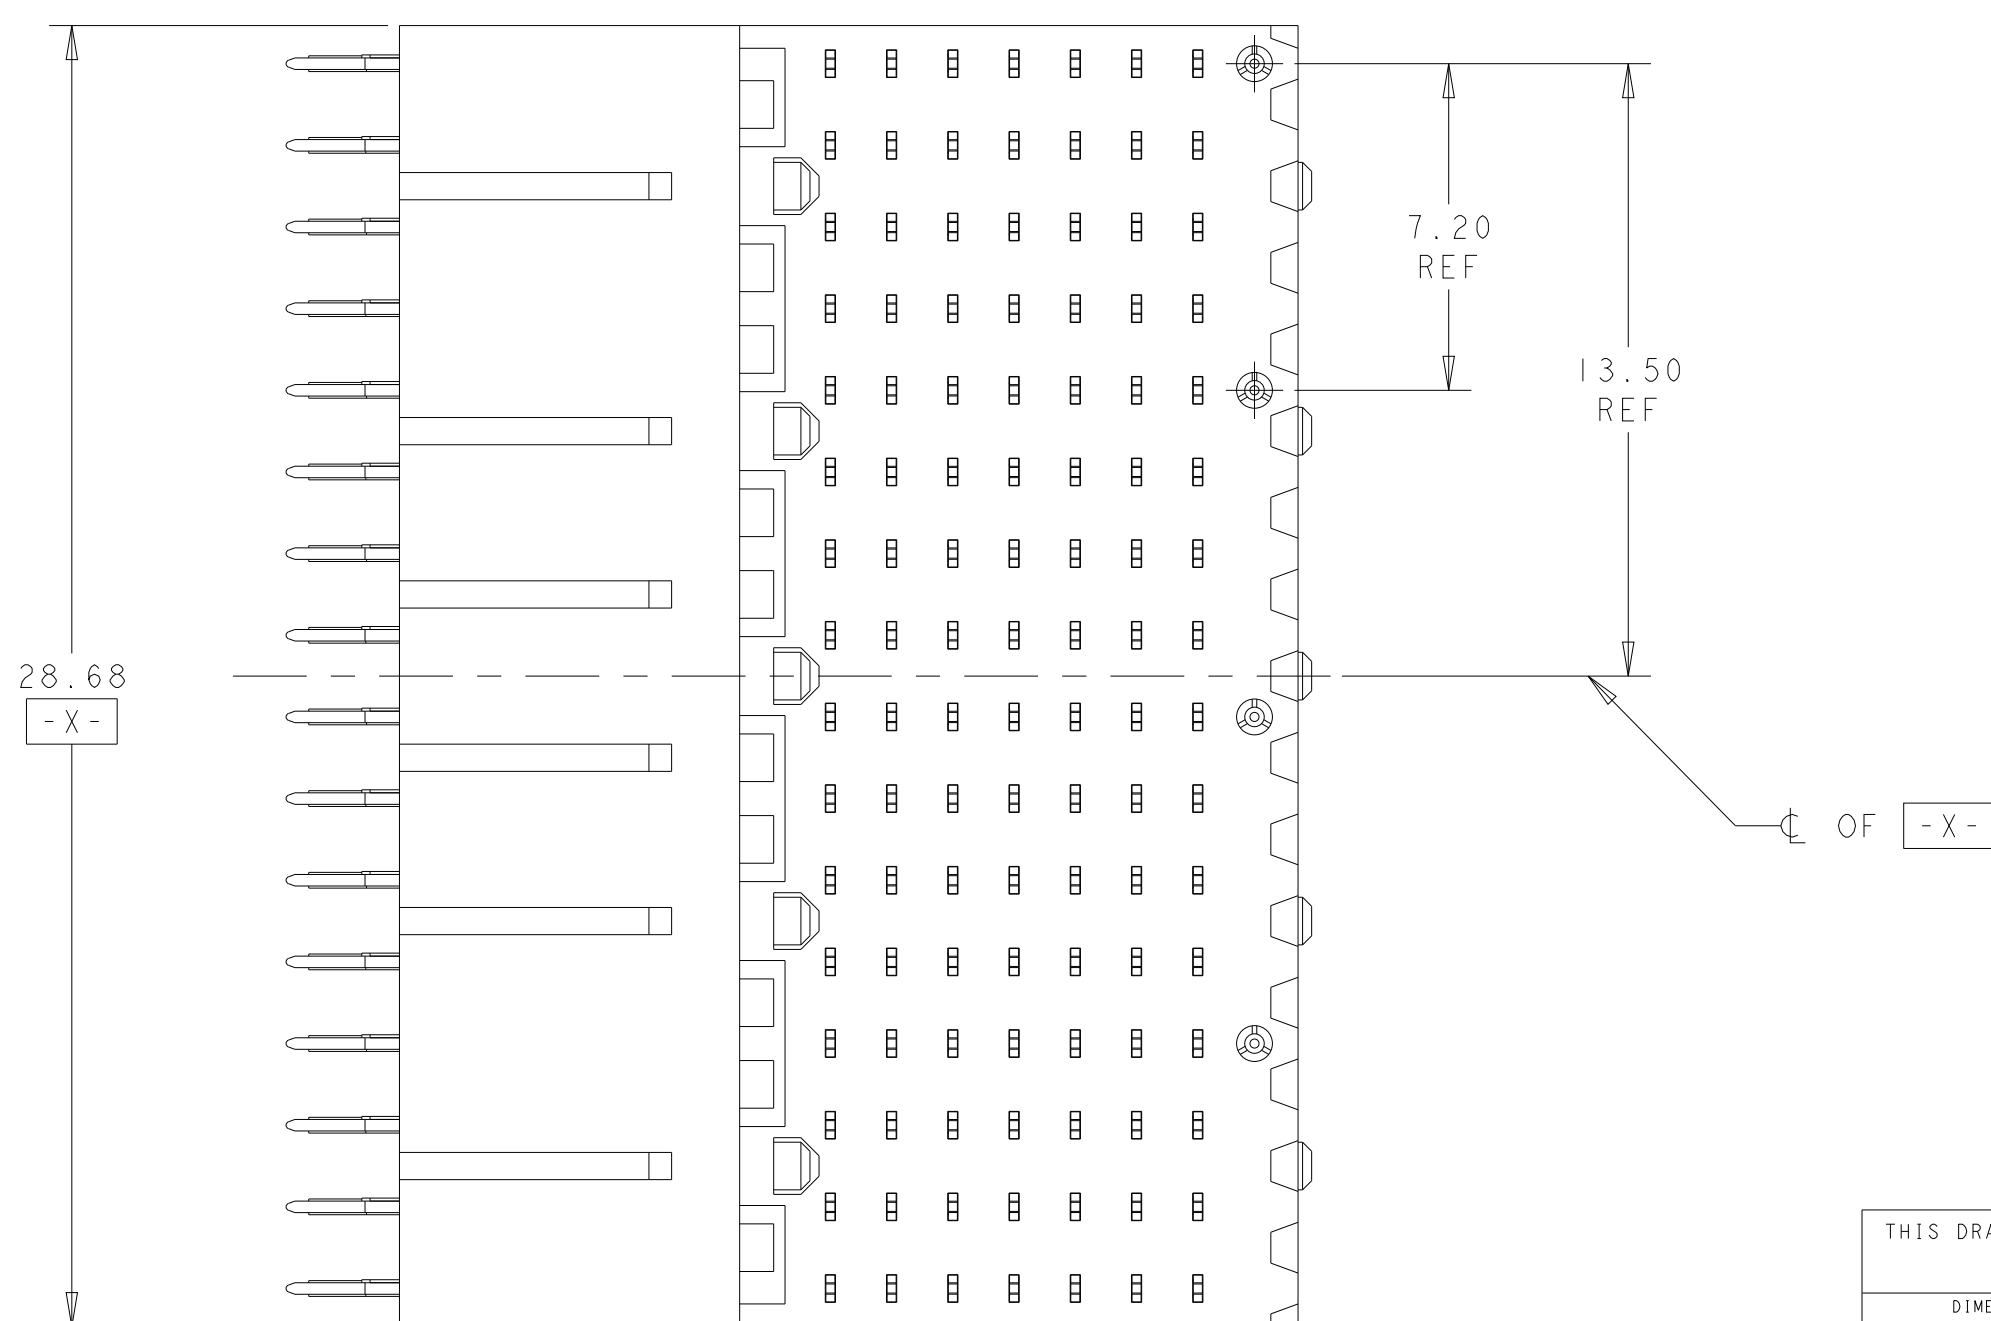

- TABLE I
INTERCONNECTIONS WITH BACKPLANE CONNECTOR 2102736-1

TYPICAL INTERCONNECTIONS FOR EACH EVEN-NUMBERED COLUMN (WAFER): 2, 4, 6, 8, 10, 12, 14, 16		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	bx	cx
	cx	dx
SIGNAL PAIR	ex	gx
	fx	hx
GROUND	ax, dx, gx, (ALL COMMONED)	ax, bx, ex, fx, ix

TYPICAL INTERCONNECTIONS FOR EACH ODD-NUMBERED COLUMN (WAFER): 1, 3, 5, 7, 9, 11, 13, 15		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	ax	ax
	bx	bx
SIGNAL PAIR	dx	ex
	ex	fx
SIGNAL	gx	ix
GROUND	cx, fx (ALL COMMONED)	cx, dx, gx, hx

NOTE: "x" DESIGNATES THE COLUMN NUMBER

	2102771-4
	2102771-2
	2102771-1
PLATING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 040C12011 S. MILLER CHK 12JAN2012 K. THACKSTON APVD 11SEP2012 M. MCALONIS		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±: 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±: ANGLES ±1°0'		NAME RIGHT-ANGLE PLUG ASSEMBLY, 7 ROW, CENTER, 20.3mm, MULTIGIG RT 2-R, DAUGHTERCARD CONNECTOR, DIFFERENTIAL	
		PRODUCT SPEC 108-272		SIZE CASE CODE DRAWING NO	
MATERIAL		APPLICATION SPEC 114-103004 114-13056		RESTRICTED TO	
		WEIGHT 10.33g		A100779C=2102771	
SEE TABLE		Customer Drawing		SCALE 6:1 SHEET 1 OF 1 REV	