


SECTION A-A

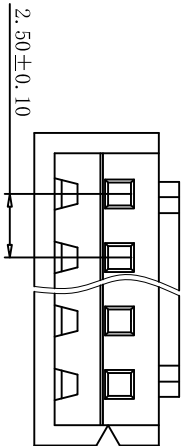

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC/DC
- Withstanding voltage: 1000V AC/minute
- Insulation resistance: 1000M Ω /min
- Temperature range: -40℃ ~ +105℃
- Contact resistance: 20m Ω max

HOUSING

- Part No.: CS-2001-10A V2 W

V2: PA66 UL94V-2 W: White, 白色

- Poles: 02-16
- Material: Nylon 66, UL94V-2, White
- Q' TY: 1000 pcs/bag

SECTION A-A

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC/DC
- Withstanding voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40℃ ~ +105℃
- Contact resistance: 20mΩ max

HOUSING

- Part No.: CS-2001-10A V2 W

V2: PA66 UL94V-2 W: White, 白色

- Poles: 02-16
- Material: Nylon 66, UL94V-2, White
- Q' TY: 1000 pcs/bag

RoHS2.0