



YAZAKI NO.	R_1	W_1	R_2	W_2	A_1	B_1	WIRE SIZE	MATERIAL
7116-2436-02	0.60	2.50	0.90	3.20	3.00	6.20	⚠ AVS 0.2~AVS 0.5 EQUIVALENT	BRASS THICKNESS t=0.32 TIN PLATING
7116-2437-02	0.90	3.30	1.40	4.60	4.00	7.20	⚠ AVS 0.85~AVS 1.25 EQUIVALENT	BRASS THICKNESS t=0.32 TIN PLATING
7116-2438-02	1.30	4.60	1.90	6.20	4.00	7.20	AVS 2.00~AVS 3.00 EQUIVALENT	COPPER ALLOY TIN PLATING



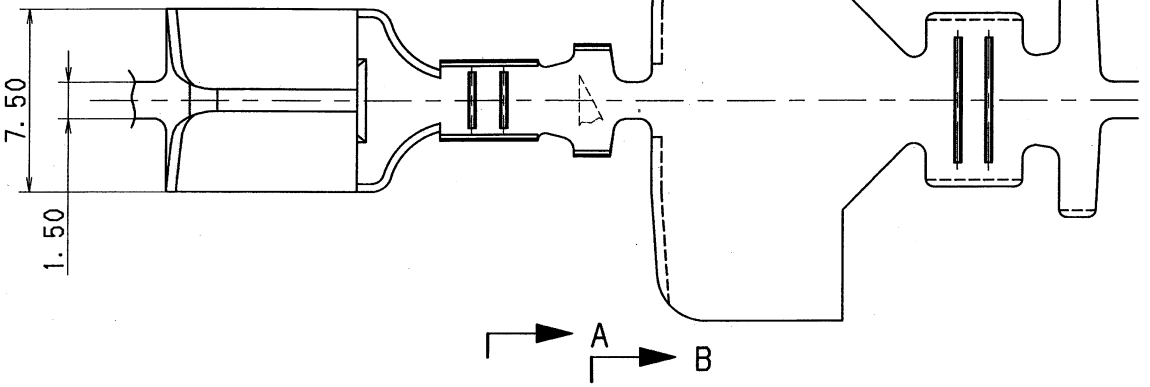




SEC. A-A



SEC. B-B

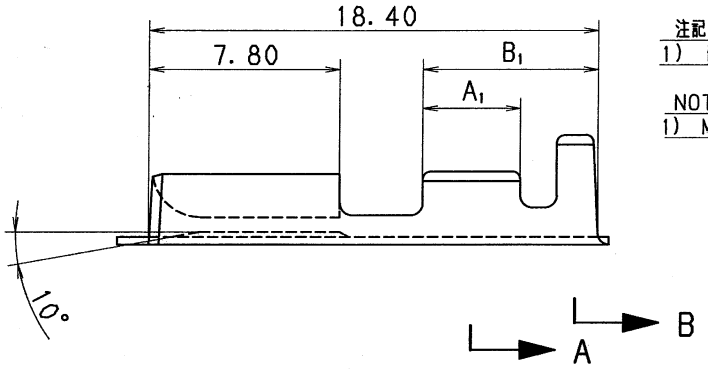

注記
1) 嵌合相手品番：ISO リレー

NOTE
1) MATING PART NO. : ISO RELAY.

ISSUE MARK

LET	DATE	REVISION RECORD	NO.	CHKD
⚠	06/09/26	CHANGED WIRE SIZE	C06-ZA49	K. S
	90/10/15	NEW	C90-M140	M. A

GENERAL TOLERANCE

	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30′	0.1
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30′	0.1
©	±0.3	±0.5	±0.8	±1.4	±2	±30′	0.15

SPECIFIED

MASS g

CUSTOMER
CUSTOMER PART NO. | CUSTOMER DWG NO.
OFFICE | TRIAL PART NO.
VENDOR
VENDOR NO.

DWG TYPE	DWG SOURCE	DWG DATE	UNIT	SCL	ANGLE
R	NEW	90/10/15	mm	5:1	3

APPROVED	CHECKED	CHECKED	DESIGN	DRAWN
千仏典	—	澤入	OHSUMI	M. MORAL
'06.10.03	—	'06.10.03	88/06/03	06/09/26

MATL. SPEC. SEE TABLE | TREAT. & FIN. SEE TABLE

NAME 250 TERMINAL FEMALE (6.3MM)

PART NO. 7116-2436-02 ETC
CH. CODE

DWG NO. 7116-2436-02:R | SET DWG NO.

YAZAKI CORPORATION