


Schottky Barrier Diode/ DATA SHEET

RB521SM5-30

- ◇ Low current rectification
- ◇ Low forward voltage
- ◇ **SOD523** Micro SMD package
- ◇ RoHS compliant
- ◇ UL-94 V-0 / Green EMC
- ◇ Matte Tin Lead finish (Pb-Free)
- ◇ Cathode Band / Device marking:

Device Marking Code	
RB521SM5-30	C

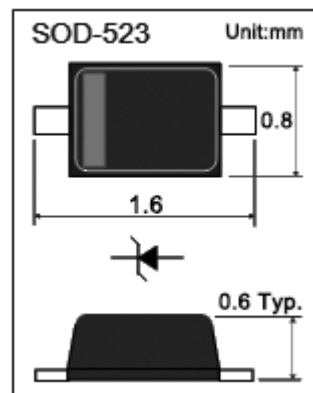

Maximum Ratings (Ta = 25 °C)

Symbol	Parameter	Value	Units
VRRM	Repetitive Peak Reverse Voltage	30	V
VRWM	Working Peak Reverse Voltage	30	V
IO	Continuous Forward Current	200	mA
IFSM	Non-Repetitive Peak Forward Current *1	1	A
TJ	Junction Temperature	125	°C
TSTG	Storage Temperature	-55 to +125	°C

*1 8.3 ms single half sine-wave

Electrical Characteristics (Ta = 25 °C)




Symbol	Parameter	Conditions	Min	TYP	Max	Units
VF	Forward Voltage	IF = 10mA			0.35	V
		IF = 200mA			0.50	V
BVR	Breakdown Voltage	IR = 500 μA	30			V
IR	Reverse Current	VR = 10V			30	μA
		VR = 20V			100	μA

Ordering Information


Device	Package	Shipping	Tape wide	Emboss pitch	Tape specification	Notes
RB521SM5-30	SOD523	Tape & Reel 8000pcs /7" Reel	8 mm	4 mm	Conductive	

Package Dimensions

Package outline : SOD-523



SOD523 Package Outline



Lead Pattern Recommendation

Unit	A	A1	b	c	D	E	E1	E2	L	θ
Max.	0.77	0.70	0.35	0.15	0.85	1.30	1.70	0.20	0.07	7°
Min.	0.51	0.50	0.25	0.08	0.75	1.10	1.50	REF.	0.01	REF.

Note:

1. Halogen free, EMC
2. Pb free solder
3. Lead thickness includes solder plating
4. Lead frame: Cu
5. Other Tolerance: ± 0.05
6. Dimensions are exclusive of Burrs, Mold Flash and Tie Bar extrusions
7. Unit: mm

NOTICE

POPPULA'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS COMPONENTS IN ANY LIFE SUPPORT DEVICES OR SYSTEMS.

POPPULA reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. POPPULA does not assume any liability arising out of the application or use of any product described herein.