

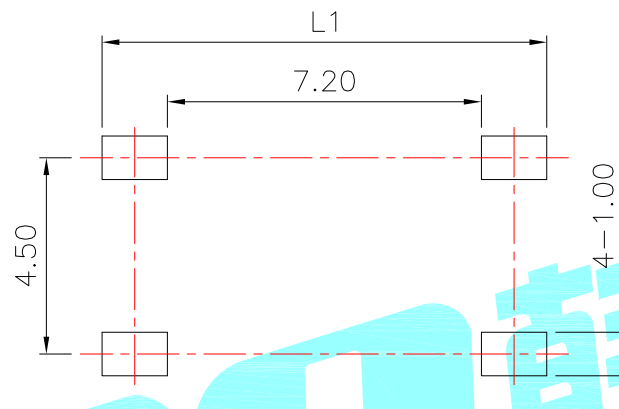
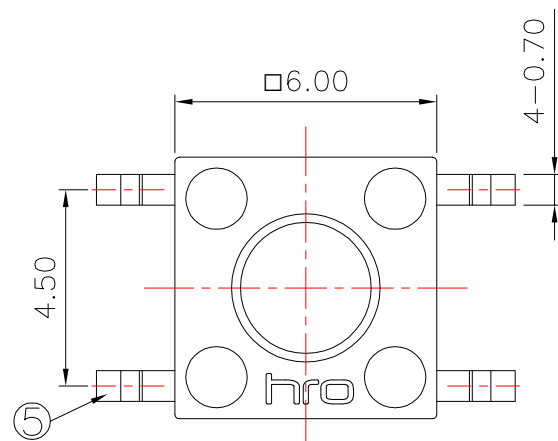



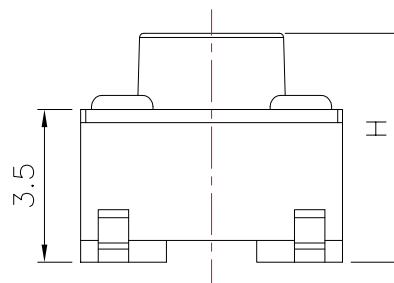

PCB Layout(Pattern side)

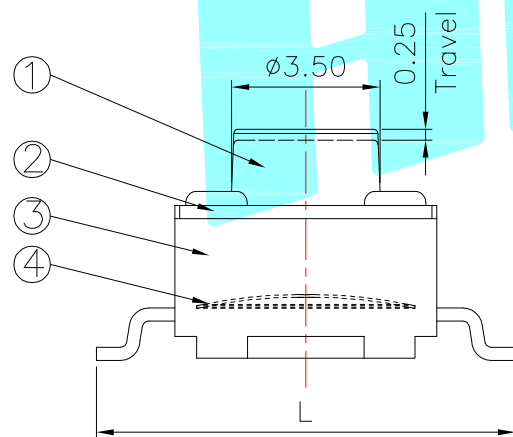

Circuit Diagram

NO.1		
PART NO	H	
A	4.3	
B	4.5	
C	5	
D	5.5	
E	6	
F	6.5	
G	7	
H	7.5	
I	8	
J	8.5	
K	9	
L	9.5	
M	10	
N	10.5	

NO.2		
PART NO	vigor	
1	90±30	
2	130±30	
3	180±30	
4	250±30	
5	350±50	

NO.3		
PART NO	MATERIAL/QTY	
S	SUS/1PC	
C	C5210/1PC	
D	SUS/2PCS	
F	C5210/2PCS	

NO.4			
PART NO	L	L1	
A	8	10	
B	8.5	11	
C	9	11	
D	9.5	12	
E	10	12	

NO.5-NO.6		
PART NO	NOTE	
01~99	SERIAL NUMBER	

NOTE:
Rating:DC 24V 50mA
Contact resistance:100mΩ Max

⑤	Terminal	—	4	Brass(0.30t)	Plating silver	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	PPA	Black	—
②	Cover	—	1	SPCC	Plating Nickel	—
①	Keystoke	—	1	PPA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		HROELECTRONICS CO.,LTD	
DRAWN	SUNNY		2020.7.7			
CHECKED					TITLE:	TACT SWITCHS
APPROVALS					PART NO.	K2-1102SP-□□□□-□□
TOLERANCES ARE			30~以上	±0.30	ANGLE	UNIT: mm
			10~30	±0.20		
			5~10	±0.15	±2'	DRAWING NO.
			~ 5	±0.10		
						SCALE: 1:1
						PROJ:
						SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.