

## Preliminary DATA SHEET

# GDM3528: 3300 to 3600MHz High Efficiency 28dBm Power Amplifier

### Product overview

GDM3528 is a three-stage HBT general purpose power amplifier working at 3300~3600MHz (Band 42, n78) with on-chip PA enable controller and temperature compensation circuits. This high-efficiency and DPD-friendly PA can deliver up to 28dBm average output power and 37dBm peak power using 20MHz LTE signal (9.5dB PAR @ 0.01% CCDF). The product input and output are both internally matched to 50Ohm.

### Key Features

- 3300MHz – 3600MHz
- 31dB Gain
- 25% PAE at 28dBm output power
- Typical -35dBc ACPR at 28dBm output power
- Higher than 37dBm peak power
- Wide instantaneous BW DPD friendly design
- Input/output internally matched to 50Ohm
- On-chip PA enable controller and temperature compensation circuits
- Compact and low-cost 5mm x 5mm LGA package (MSL3, 260°C per JEDEC J-STD-020)
- ESD Level: HBM 1000V; CDM 1000V

### Applications

- FDD and TDD 2G/3G/4G LTE/5G NR systems
- 3GPP band 42, n78 small-cell base stations
- Driver amplifier for micro-base and macro-base stations
- Active antenna array and massive MIMO
- Customer Premises Equipment (CPE)

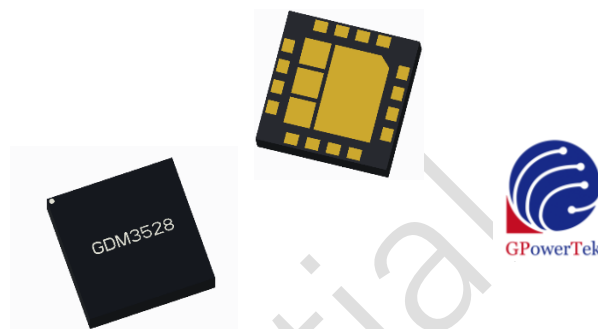


Figure 1. 16 Pad 5 x 5 mm Laminate Package

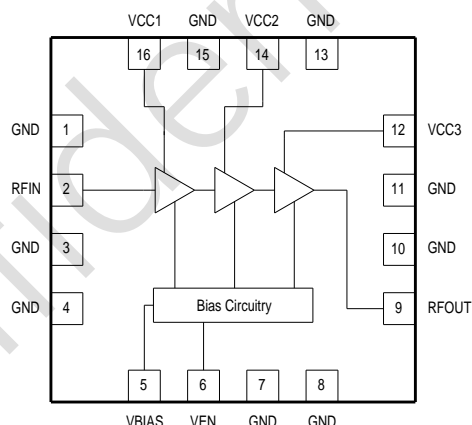


Figure 2. GDM3528 Function Block Diagram

Table 1. Pin-to-Pin Compatible PA Family

Part Number	Frequency (MHz)	3GPP Band
GDM0628	617-652	B71, n71
GDM0728	728-821	B20, n20
GDM0828	869-894	B5, n5
GDM0928	925-960	B8, n8
GDM1828	1805-1880	Band 3, n3
GDM2128	2110-2170	Band 1, n1
GDM2428	2300-2400	Band 40, n40
GDM2628	2496-2690	Band 41, n41
GDM3728	3400-3800	Band 42, n78
GDM4028	3700-4000	C-band
GDM5028	4600-5000	n79

### Ordering Information

Part No.	Description
GDM3528	3300-3600MHz High efficiency PA, 7' Reel with 1500pcs