

**FEATURES**


- \* 2.3 inch (58.42 mm) MATRIX HEIGHT.
- \* LOW POWER REQUIREMENT.
- \* SINGLE PLANE, WIDE VIEWING ANGLE.
- \* SOLID STATE RELIABILITY.
- \* 8x 8 ARRAY WITH X-Y SELECT.
- \* COMPATIBLE WITH USASCII AND EBCDIC CODES.
- \* STACKABLE HORIZONTALLY.
- \* CATEGORIZED FOR LUMINOUS INTENSITY.

**DESCRIPTION**


The LTP-2088AC is a 2.3 inch ( 58.42 mm) matrix height 8x 8 dot matrix displays. This device utilizes AlGaAs red LED chips are made which from AlGaAs on a non-transparent GaAs substrate, with a black face and white dot color.

**DEVICE**

PART NO.	DESCRIPTION
AlGaAs RED	ANODE COLUMN
LTP-2088AC	CATHODE ROW

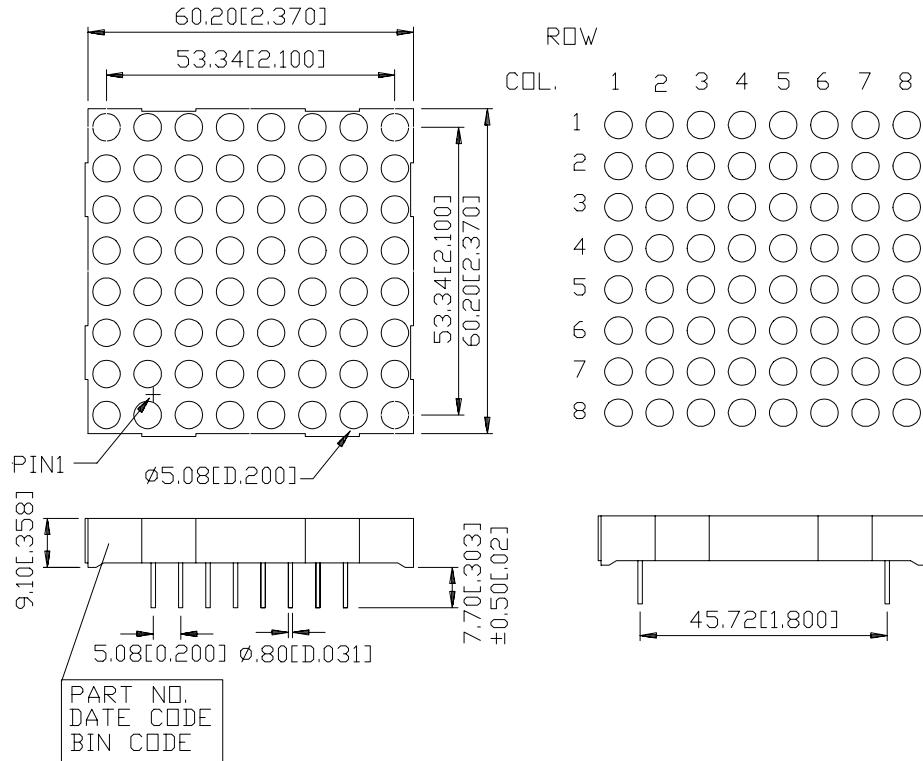**PACKAGE DIMENSIONS**

NOTES: All dimensions are in millimeters. Tolerance is  $\pm 0.25$  mm (0.01") unless otherwise noted.

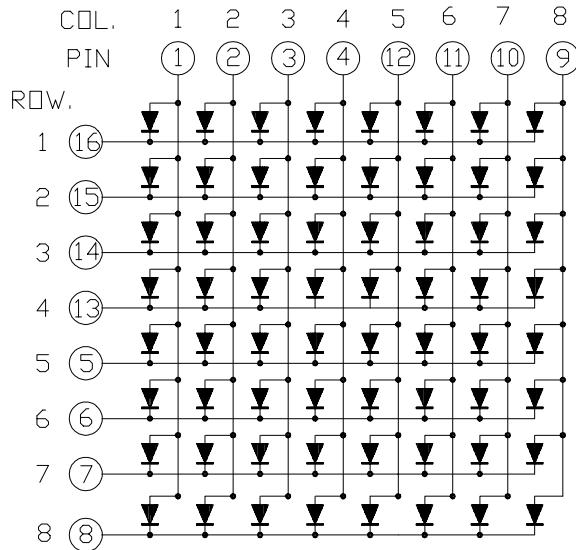**INTERNAL CIRCUIT DIAGRAM**

**PIN CONNECTION**

No.	CONNECTION
1	ANODE COLUMN 1
2	ANODE COLUMN 2
3	ANODE COLUMN 3
4	ANODE COLUMN 4
5	CATHODE ROW 5
6	CATHODE ROW 6
7	CATHODE ROW 7
8	CATHODE ROW 8
9	ANODE COLUMN 8
10	ANODE COLUMN 7
11	ANODE COLUMN 6
12	ANODE COLUMN 5
13	CATHODE ROW 4
14	CATHODE ROW 3
15	CATHODE ROW 2
16	CATHODE ROW 1

**ABSOLUTE MAXIMUM RATING AT Ta=25°C**

<b>PARAMETER</b>	<b>AlGaAs RED</b>	<b>UNIT</b>
Average Power Dissipation Per Dot	36	mW
Peak Forward Current Per Dot	125	mA
Average Forward Current Per Dot	15	mA
Derating Linear From 25°C Per Dot	0.2	mA/°C
Reverse Voltage Per Dot	5	V
Operating Temperature Range	-35°C to +85°C	
Storage Temperature Range	-35°C to +85°C	
Solder Temperature: max 260°C for max 3sec at 1.6mm[1/16inch] below seating plane.		

**ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C**

<b>PARAMETER</b>	<b>SYMBOL</b>	<b>MIN.</b>	<b>TYP.</b>	<b>MAX.</b>	<b>UNIT</b>	<b>TEST CONDITION</b>
Average Luminous Intensity	I <sub>v</sub>	6300	12000		μcd	I <sub>f</sub> =80mA 1/16Duty
Peak Emission Wavelength	λ <sub>p</sub>		660		nm	I <sub>f</sub> =20mA
Spectral Line Half-Width	Δλ		35		nm	I <sub>f</sub> =20mA
Dominant Wavelength	λ <sub>d</sub>		638		nm	I <sub>f</sub> =20mA
Forward Voltage any Dot	V <sub>F</sub>		1.8	2.4	V	I <sub>f</sub> =20mA
			2.0	2.7		I <sub>f</sub> =80mA
Reverse Current any Dot	I <sub>R</sub>			100	μA	V <sub>R</sub> =5V
Luminous Intensity Matching Ratio	I <sub>v-m</sub>			2:1		I <sub>f</sub> =10mA

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

**TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES**

(25°C Ambient Temperature Unless Otherwise Noted)

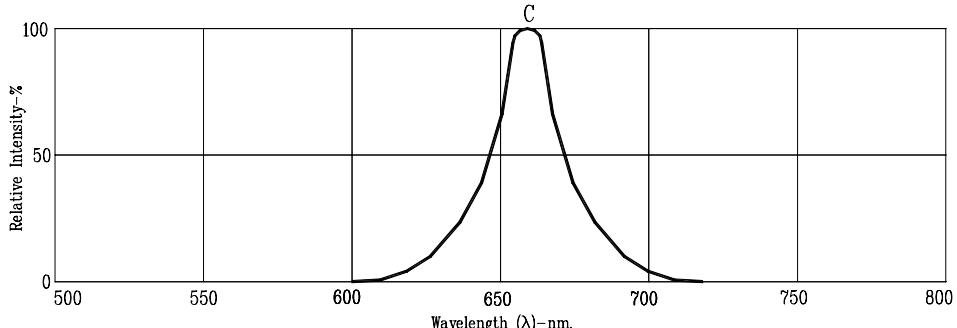
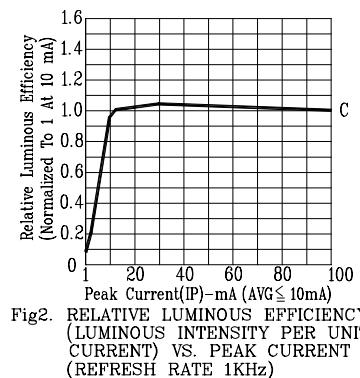






Fig.1. RELATIVE INTENSITY VS. WAVELENGTH

Fig.2. RELATIVE LUMINOUS EFFICIENCY  
(LUMINOUS INTENSITY PER UNIT  
CURRENT) VS. PEAK CURRENT  
(REFRESH RATE 1KHz)Fig.3. FORWARD CURRENT VS.  
FORWARD VOLTAGEFig.4. RELATIVE LUMINOUS INTENSITY  
VS. FORWARD CURRENTFig.5. MAX. AVERAGE FORWARD  
CURRENT VS. AMBIENT  
TEMPERATURE.Fig.6. MAX. PEAK CURRENT VS.  
DUTY CYCLE %  
(REFRESH RATE 1KHz)

NOTE : C=AlGaAs RED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Lite-On:](#)

[LTP-2088AC](#)