


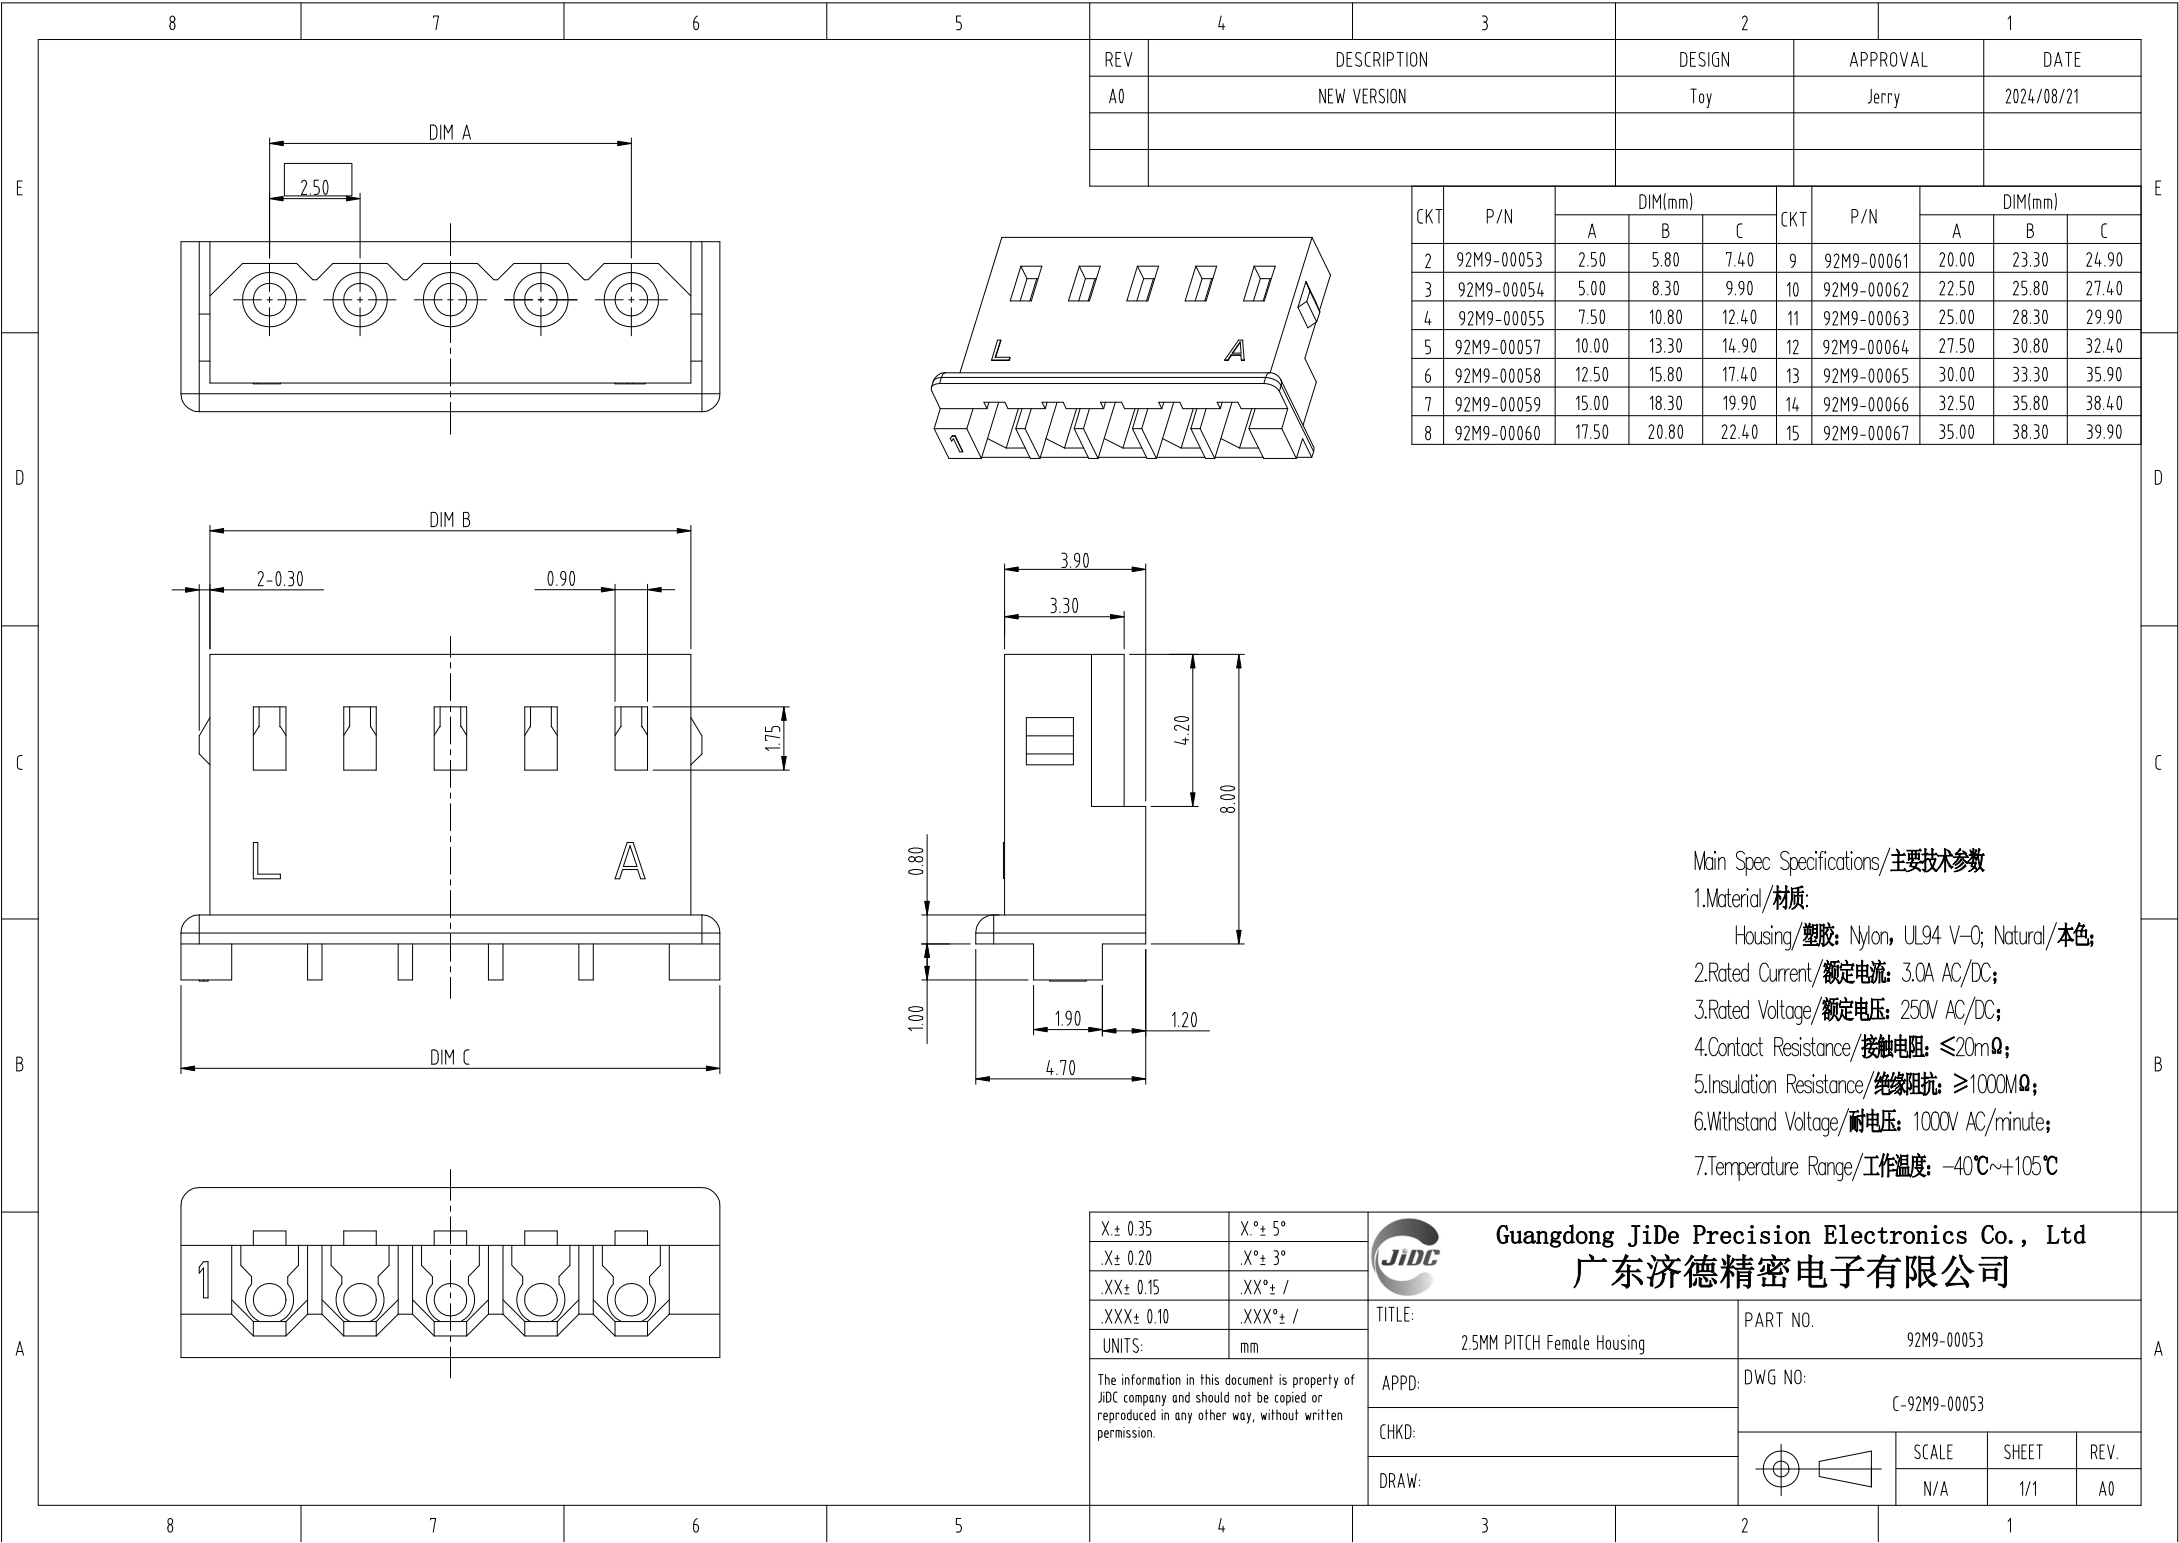

REV	DESCRIPTION	DESIGN	APPROVAL	DATE
A0	NEW VERSION	Toy	Jerry	2024/08/21

CKT	P/N	DIM(mm)			CKT	P/N	DIM(mm)		
		A	B	C			A	B	C
2	92M9-00053	2.50	5.80	7.40	9	92M9-00061	20.00	23.30	24.90
3	92M9-00054	5.00	8.30	9.90	10	92M9-00062	22.50	25.80	27.40
4	92M9-00055	7.50	10.80	12.40	11	92M9-00063	25.00	28.30	29.90
5	92M9-00057	10.00	13.30	14.90	12	92M9-00064	27.50	30.80	32.40
6	92M9-00058	12.50	15.80	17.40	13	92M9-00065	30.00	33.30	35.90
7	92M9-00059	15.00	18.30	19.90	14	92M9-00066	32.50	35.80	38.40
8	92M9-00060	17.50	20.80	22.40	15	92M9-00067	35.00	38.30	39.90

Main Spec Specifications/主要技术参数

- 1.Material/材质:
Housing/塑胶: Nylon, UL94 V-0; Natural/本色;
- 2.Rated Current/额定电流: 3.0A AC/DC;
- 3.Rated Voltage/额定电压: 250V AC/DC;
- 4.Contact Resistance/接触电阻: $\leq 20m\Omega$;
- 5.Insulation Resistance/绝缘阻抗: $\geq 1000M\Omega$;
- 6.Withstand Voltage/耐电压: 1000V AC/minute;
- 7.Temperature Range/工作温度: $-40^{\circ}C \sim +105^{\circ}C$

X $\pm$ 0.35	X° $\pm$ 5°		Guangdong JiDe Precision Electronics Co., Ltd 广东济德精密电子有限公司	
.X $\pm$ 0.20	.X° $\pm$ 3°			
.XX $\pm$ 0.15	.XX° $\pm$ /		PART NO. 92M9-00053	
.XXX $\pm$ 0.10	.XXX° $\pm$ /		DWG NO: C-92M9-00053	
UNITS: mm			SCALE N/A SHEET 1/1 REV. A0	
The information in this document is property of JiDC company and should not be copied or reproduced in any other way, without written permission.		TITLE:	2.5MM PITCH Female Housing	
		APPD:		
		CHKD:		
		DRAW:		