

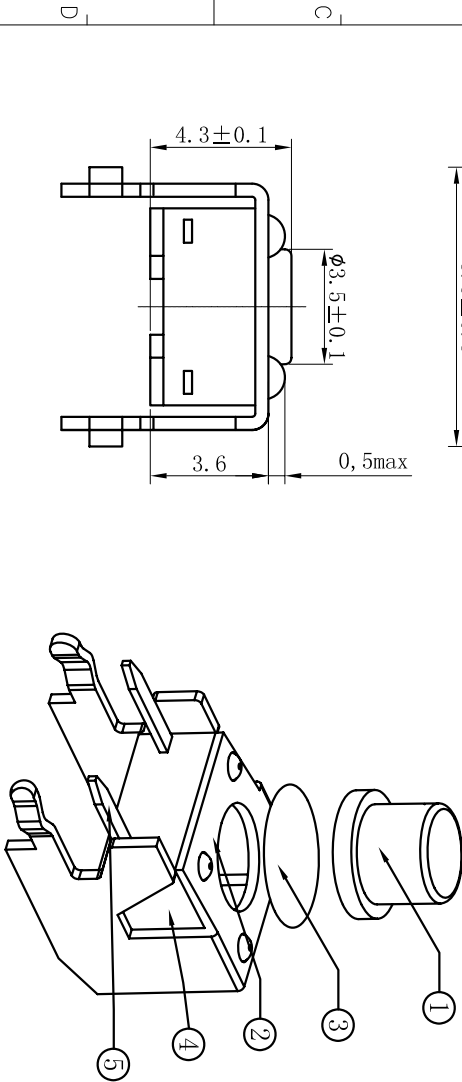



REV	ECN NO.	APPD
A	HG-17-0015	PRJ0J0M

规格 Specifications

额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	100mΩ max.
绝缘电阻 Insulation resistance	DC100V 50S 100MΩ min.
抗电强度 Dielectric strength	AC250V(50~60HZ) 60S min.
操作力 Operation force	160±40gf
寿命试验 Operating Life	100,000 cycles
行程 Travels	0.25±0.1mm

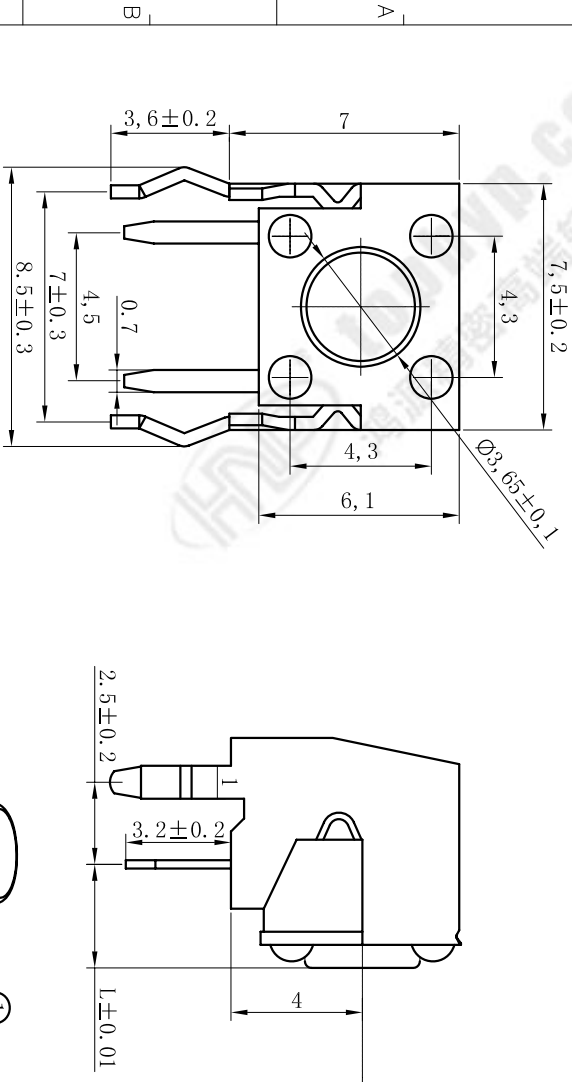

CIRCUIT DIAGRAM



PRODUCT NO. : 1TS005*****-***** AB - CT

轻触开关
6X6系列
外形:
按钮颜色:
底座颜色:
盖板颜色:
操作力度:
160=160gf
260=260gf

材料:
0=初始材料
1=新增材料
依次增加
产品高度(H):
430=4.30mm
500=5.00mm

手感:
0=常规
1=大手感
2=小手感
3=特殊手感

非编带, 不启用

ITEM	PART NAME	QTY	MATERIAL	FINISH
5	TERMINAL	1	H62Y	Ag-PLATED
4	HOUSING	1	PPA	BLACK
3	DOME	1	Stainless Steel	Ag-PLATED
2	COVER	1	BRASS	Sn-PLATED
1	ACTUATOR	1	PPA	BLACK
1	PART NAME	QTY	MATERIAL	FINISH

X. ± 0.3	X' ± 3'	UNITS
X ± 0.2	X' ± 2'	MAT'L
.XX ± 0.1	.XX' ± 1'	FINISH
.XXX ± 0.05	.XXX' ± 0.5'	

NAME(NTENDED USE) 6X6 T/H SERIES TACT SWITCH	HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA.
PART NO.(NTENDED USE) 1TS005D-1600-4301AB	PRODUCT DRAWING
APPD: W.P.Lu 2017.1.12	DWG NO.: 1TS005D-1600-4301AB
CHKD: S.Li 2017.1.12	SCALE SHEET REV.
DR: Y.Y.Chen 2017.1.12	10/1 1/1 A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.