

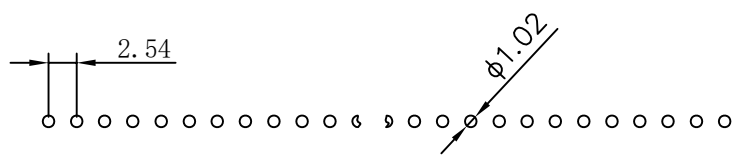


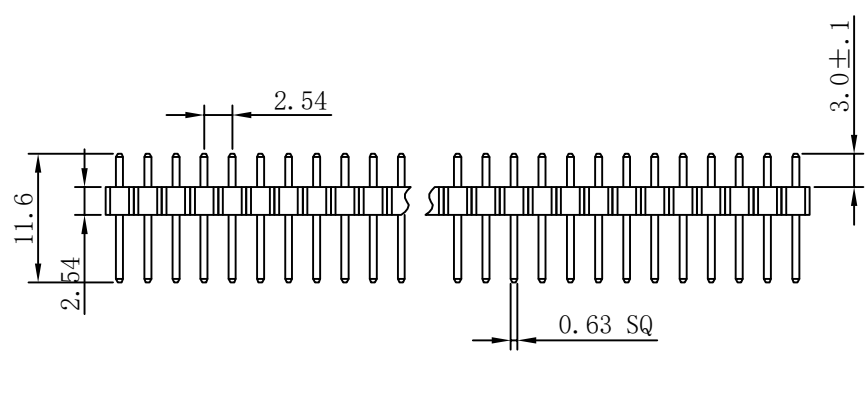

N=PIN数

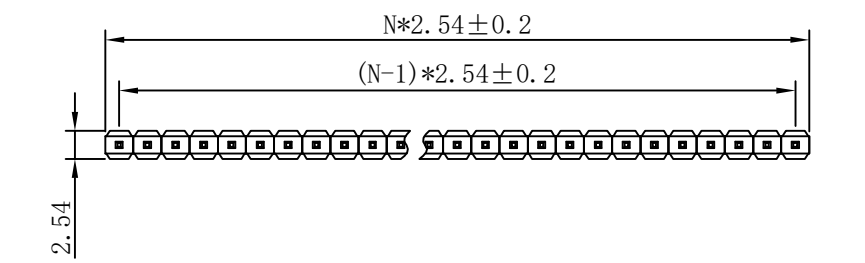

P.C.B LAYOUT

材料Material

原料Insulator:PBT/PA9T(UL 94V-0)

相关材料Related Material: Brass

表面涂层Surface Coating: Au or Over Ni

规格Specification

额定电流Current rating:2.5AMP

耐压Dielectric Withstanding Voltage:500v Ac Min

绝缘电阻Insulation Resistance:1000MΩ min

接触电阻Contact resistance:20MΩ Max

工作温度Working Temperature:-40℃~+105℃

Max.Processing Temp瞬时温度:

PBT 230° ±5° 10S

PA9T 260° ±5° 10S

上海洲日电子有限公司

Shanghai Zhouri Electronics CO.,LTD

上海康司玛电子科技有限公司

Shanghai Consma Electronic Technology Co., Ltd

tel:021-51571121

http://www.zhouri.net

fax:021-51571120

http://www.ksmchina.com

产品名称:

PZ2.54-1\*N

绘图:	牛万龙	日期:20250226
审核:	张海娜	日期:20250226
版本编号:	ZRLCGY2025-02-26-SX A/1	

第三视角:

单位: mm

比例:

图幅:A4

页次 共 01 第 01