




备注(Remark)
1. 材料(MATERIAL)
胶芯: PBT+30%G.F UL94V-0, 颜色: 黑色.
Housing: PBT+30%G.F UL94V-0, Color: Black
端子: 青铜, 镍底30u"MIN, 表面镀普金
Contact: Bronze, GOLD PLATING OVER ALL
30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 3 AMP
 Rating Current: 3 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V/分钟.
 Withstanding Voltage: AC 500V/Minute.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

RoHS
COMPLIANT


客编: K8002

1. 带*为品质重点检验尺寸

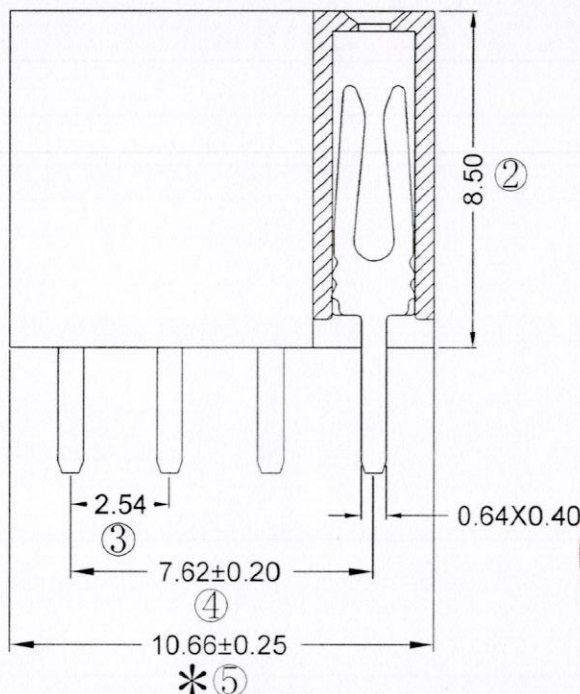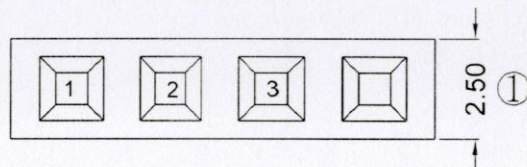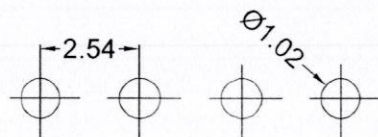

F185-11 04 A0 A SY A 1

NO.OF PINS	Contact Plating		INSULATOR	PACKING
PER ROW	Full Of Gold	Semi-gold	MATERIAL:	A: PE Bag
1-40P	A0=0.8u"	B0=0.8u"	A: PBT	B: Tape & Reel
	A1=1u"	B1=1U"	B: PA6T	C: Tube
	A2=1.5u"	B2=1.5U"	C: PA9T	D: Tube+CAP
	A3=2u"	B3=2U"	D: LCP	E: Tray
	A4=3u"	B4=3U"		
	A5=5u"	B5=5U"		
	A6=10u"	B6=10U"		
	A7=15u"	B7=15U"		
	A8=20u"	B8=20U"		
	A9=30u"	B9=30U"		
	S1=Ordinary Tin Plated			
	S2=Matte Tin Plated			
	S3=Tin-plated High-temperature			



				OPERATION		SCALE		Fit	 东莞市宇熙精密连接器有限公司 www.yxcon.com Dongguan Yuxi Electronic Co.,Ltd.		
				X.X	±0.25	UNIT		MM			
				X.XX	±0.20	SIZE	A4	DESIGN	李官森2022.03.29	PART NO.	F185-1104A0ASYA1
A0	2022.03.29	/	新版发行	X.XXX	±0.10						
				Angle	±3°	SHEET	1/1	CHECK		TITLE:	2.54排母8.5mm型高 1*4P 180度 Y型 PBT料 镀黄金
REV	DATE	SYMBOL	MODIFICATION DESCRIPTION	DIM	TOL	PROJ.		APPROVE		Customer No.	